



---

FACILITY 10: eMarine Information Infrastructure (eMII)

# **IMOS NETCDF USER'S MANUAL**

NetCDF Conventions and Reference Tables

**Version 1.3**  
**February 27th, 2012**

Sebastien Mancini, Katherine Tattersall, Roger Proctor, Guillaume Galibert  
info@emii.org.au

## Table of contents

---

<b>PREFACE TO VERSION 1.3</b> .....	<b>V</b>
PREFACE TO VERSION 1.2.....	IX
PREFACE TO VERSION 1.1.....	XI
<b>1 - OVERVIEW</b> .....	<b>1</b>
1.1 - ABOUT IMOS.....	1
1.2 - ABOUT THIS DOCUMENT.....	1
1.3 - IMOS DATA MANAGEMENT STRUCTURE AND DATA ACCESS.....	2
<b>2 - IMOS DATA FORMAT</b> .....	<b>2</b>
<b>3 - NETCDF FILE STRUCTURE</b> .....	<b>7</b>
3.1 - GLOBAL ATTRIBUTES.....	7
3.1.1 - Definition.....	7
3.1.2 - List of the core global attributes.....	7
3.1.3 - List of the optional global attributes.....	12
3.1.4 - Time formats.....	16
3.1.4.1 - Actual time.....	16
3.1.4.2 - Time zone.....	17
3.1.5 - File versioning.....	17
3.1.6 - Global Attributes added by the user.....	18
3.2 - DATA FILE DIMENSIONS.....	18
3.3 - VARIABLES.....	19
3.3.1 - Coordinate variables.....	20
3.3.1.1 - TIME.....	20
3.3.1.2 - Location (X- Y horizontal Space).....	23
3.3.1.2.1 - LATITUDE.....	24
3.3.1.2.2 - LONGITUDE.....	26
3.3.1.3 - Vertical coordinate.....	28
3.3.1.3.1 - DEPTH.....	28
3.3.1.3.2 - HEIGHT.....	31
3.3.2 - Data variables.....	31

3.3.3 - Ancillary variables.....	35
3.3.4 - Data variable attributes added by user.....	36
3.3.5 - Quality control (QC).....	36
3.3.5.1 - Introduction.....	36
3.3.5.2 - Quality Control sets used by the IMOS project.....	36
3.3.5.3 - Definition of the variables and attributes.....	37
3.3.5.4 - Example of the <PARAM_quality_control> variable.....	37
3.3.5.5 - QC coordinate variables.....	39
3.3.6 - Uncertainty.....	40
3.3.6.1 - Introduction.....	40
3.3.6.2 - Implementation in IMOS.....	40
3.3.6.3 - Example.....	41
3.3.7 - Example (see Appendix 1).....	41
<b>4 - IMOS METADATA FORMAT .....</b>	<b>42</b>
4.1 - IMOS MEST.....	42
<b>5 - IMOS FILE NAMING CONVENTION.....</b>	<b>43</b>
<b>6 - REFERENCE TABLES.....</b>	<b>44</b>
6.1 - IMOS PARAMETER DICTIONARY.....	44
6.2 - QUALITY CONTROL FLAG SCALE.....	49
6.2.1 - Introduction.....	49
6.2.2 - Quality Control Set.....	49
6.2.3 - SET 1 IMOS standard set using the IODE flags.....	50
6.2.4 - SET 2 ARGO quality control procedure.....	51
6.2.4.1 - ARGO measurement flag scale.....	51
6.2.4.2 - ARGO profile quality flags.....	52
6.2.5 - SET 3 BOM quality control procedure (SST and Air-Sea fluxes).....	54
6.2.6 - Set 4 WOCE quality control procedure (Multidisciplinary Underway Network – CO <sub>2</sub> measurements).....	55
6.3 - CELL METHODS.....	56
<b>7 - REFERENCES.....</b>	<b>57</b>
<b>APPENDIX 1: EXAMPLE NETCDF FILE.....</b>	<b>59</b>
<b>APPENDIX 2: IMOS TOOLBOX OPTIONAL GLOBAL ATTRIBUTES .....</b>	<b>63</b>

APPENDIX 3: IMOS NETCDF FILENAMING CONVENTION V 1.4 .....65

## Index of Tables

---

Table 1 A CDL (Common Data Language) description of a NetCDF file that contains data from the IMOS Ship of Opportunity Sea Surface Temperature Sub-Facility. CDL notation can be generated from NetCDF files using the NetCDF utility <i>ncdump</i> .	4
Table 2 List of core mandatory global attributes for IMOS NetCDF files	8
Table 3 List of optional global attributes for IMOS NetCDF files	12
Table 4 An example list of Dimensions for an IMOS NetCDF file	19
Table 5 List of attributes defining the TIME variable for IMOS NetCDF files	21
Table 6 List of attributes that define the LATITUDE variable for IMOS NetCDF files	24
Table 7 List of attributes to define the LONGITUDE variable for IMOS NetCDF files	26
Table 8 List of attributes that define the DEPTH variable for IMOS NetCDF files	28
Table 9 List of data variables attributes for IMOS NetCDF files	32
Table 10 List of attributes used to define a Quality Control variable	37

## Index of Reference Tables

---

Reference Table A : List of IMOS parameter names, standard names (or long names for Non CF parameters) and units. Non-CF parameters are marked with the symbol "†".	45
Reference Table B : List of QC procedure flags used in the IMOS project	49
Reference Table C : IMOS standard set using the IODE flags	50
Reference Table D : ARGO measurement flag scale	51
Reference Table E : ARGO profile quality flags	52
Reference Table F : BOM Quality Control procedure flags (SST and Air Sea Fluxes)	54

## PREFACE to version 1.3

---

In response to comments and improvements for the ANMN (Australian National Moorings Network) facility we have made a number of changes to the IMOS NetCDF user's manual. These minor changes are summarised below:

### **Global Attributes**

#### **Section 3.1 - has been modified to separate historical Table 2 in two tables**

- Table 2 and Table 4 in order to distinguish core from optional metadata.
- Previous appendix 2 is now appendix 3.
- New appendix 2 describes all new ANMN oriented optional global attributes.

#### **In section "What" of**

- Table 2, attribute <naming\_authority> is now mandatory.
- Table 3, attributes <file\_version> and <file\_version\_quality\_control> have been added, as well as a new section 3.1.5 - describing how to use them.
- Table 3, attributes <institution\_address> and <institution\_postal\_address> have been added.
- Table 3, the attribute <instrument> has been added.
- appendix 2, attributes <toolbox\_input\_file>, <toolbox\_version>, <deployment\_code>, <instrument\_serial\_number>, <instrument\_sample\_interval>, <instrument\_burst\_interval> and <instrument\_burst\_duration> have been added.

#### **In section "Who" of**

- Table 2, attributes <data\_center> and <author> are now mandatory.

#### **In section "Where" of**

- Table 3, attributes <geospatial\_lat\_units>, <geospatial\_lon\_units> and <geospatial\_vertical\_units> have been added.
- appendix 2, attributes <instrument\_nominal\_height>, <instrument\_nominal\_depth>, <site\_nominal\_depth> and <site\_depth\_at\_deployment> have been added.

#### **In section "When" of**

- appendix 2, attributes <time\_deployment\_start> and <time\_deployment\_end> have been added.
  
- The convention used to describe the global attributes <author> and <principal\_investigator> is the following: last name and then first name separated by a comma.
  
- Section 3.3.6.2 - has been renamed 'Implementation in IMOS'.
  
- In section 3.3.6.2 -, the definition of accuracy and precision are now given.

### **Variables**

- For the variable TIME, the attribute <calendar> is now mandatory (Table 5).
  
- Section 3.3.1.3 - now deals with general vertical coordinate variables. Depth but also height are described in sub-chapters. Two new datums "sensor" and "sea bottom" are available and "surface" has been renamed "sea surface"
  
- Two new variable attributes <applied\_offset> and <sensor\_serial\_number> are available (Table 9).
  
- Variable attribute <standard\_name> is not mandatory anymore, but <long\_name> is now mandatory (Table 9).
  
- Variable attribute <\_FillValue> is not mandatory anymore for variables that are dimensions or that are ancillary variables.
  
- Variable attribute <quality\_control\_set> is not mandatory anymore for variables that are not ancillary variables.

### **Other changes**

- Referenced NetCDF CF convention has been updated from version 1.4 to 1.6.
  
- At the end of section 2 - given url strings have been converted into hyperlink.
  
- Check and update of all hyperlinks when necessary.
  
- In section 6.1 - it is now possible to deal with multiple instances of the same parameter.

- IMOS MEST url has been updated.
- In Reference Table A, the parameter ABSI has been added for acoustic\_backscatter\_intensity.
- In Reference Table A, the parameter ADCP\_CORR has been added for adcp\_correlation\_magnitude.
- In Reference Table A, the parameter ADCP\_GOOD has been added for adcp\_percentage\_good.
- In Reference Table A, the parameter CPHL has been renamed mass\_concentration\_of\_chlorophyll\_in\_sea\_water and is now CF (standard name table version 17).
- In Reference Table A, the parameter CHLF has been added for mass\_concentration\_of\_chlorophyll\_in\_sea\_water (factory calibration coefficient).
- In Reference Table A, the parameter CHLU has been added for mass\_concentration\_of\_chlorophyll\_in\_sea\_water (user calibration coefficient).
- In Reference Table A, the parameter CHLR has been added for raw\_concentration\_of\_chlorophyll\_in\_sea\_water.
- In Reference Table A, the parameter DOX1 has been added for mole\_concentration\_of\_dissolved\_molecular\_oxygen\_in\_sea\_water.
- In Reference Table A, the parameter DOXS has been added for fractional\_saturation\_of\_oxygen\_in\_sea\_water.
- In Reference Table A, the parameter ECUR has been added for error\_sea\_water\_velocity.
- In Reference Table A, the parameter FLU2 has been renamed fluorescence\_in\_sea\_water.
- In Reference Table A, the parameter FREQUENCY has been added for frequency.
- In Reference Table A, the parameter HEADING has been added for heading.
- In Reference Table A, the parameter HEIGHT\_ABOVE\_SENSOR has been added for height\_above\_sensor.
- In Reference Table A, the parameter NTRI is now CF (standard name table version 17).
- In Reference Table A, the parameter PITCH has been added for platform\_pitch\_angle.
- In Reference Table A, the parameter PRES\_REL has been added for sea\_water\_relative\_pressure.



- In Reference Table A, the parameter ROLL has been added for platform\_roll\_angle.
- In Reference Table A, the parameter SLCA is now CF (standard name table version 17).
- In Reference Table A, the parameter SSDS has been added for sea\_surface\_wave\_directional\_spread.
- In Reference Table A, the parameter SSPD has been added for speed\_of\_sound\_in\_sea\_water.
- In Reference Table A, the parameter SSWD has been added for sea\_surface\_wave\_direction\_spectral\_density.
- In Reference Table A, the parameter SSWP has been added for sea\_surface\_swell\_wave\_period.
- In Reference Table A, the parameter SSWV has been added for sea\_surface\_wave\_directional\_variance\_spectral\_density.
- In Reference Table A, the parameter VOLT has been added for voltage.
- In Reference Table A, the parameter WAV\_DIR has been added for sea\_surface\_wave\_from\_direction.
- In Reference Table A, the parameter ZCUR has been renamed WCUR for upward\_sea\_water\_velocity.
- In Reference Table A, redundant parameters EWCT, NSCT and HCSP have been deleted.
- In section 6.2.2 - the WOCE set of Quality Control procedure has been added. Section 6.2.6 - has been created to describe this scale of QC flags.

## PREFACE to version 1.2

eMII (eMarine Information Infrastructure) recently released version 1.1 of the NetCDF convention. In response to comments we have made a number of changes to the IMOS NetCDF user's manual. These minor changes are summarised below:

### **Global Attributes**

**The attribute <date\_modified> has been added (**

- Table 2).

**The attribute <principal\_investigator\_name> has been renamed <principal\_investigator> (**

- Table 2).

**The attribute <principal\_investigator\_email> has been added (**

- Table 2).

**Descriptions of the attributes <references> and <institution\_references> have been clarified.**

**Multiple references need to be separated with a semicolon (**

- Table 2).

**The 'type' of the global attributes has been added to**

- Table 2. The type values are **S** for string, **N** for numeric (byte, short, long, integer, float or double), **D** for the type of the data variable and **Q** for the type of the corresponding quality control data variable.

### **Variables**

- The 'type' of the variable attributes has been added (Table 5, Table 6, Table 7, Table 8, Table 9 and Table 10). The type values are S for string, N for numeric (byte, short, long, integer, float or double), D for the type of the data variable and Q for the type of the corresponding quality control data variable.
- The attribute <QC\_set> has been renamed more clearly as <quality\_control\_set> (Table 5, Table 6, Table 7, Table 8, Table 9 and Table 10).
- The attribute <QC\_indicator> has been renamed more clearly as <quality\_control\_indicator> (Table 5, Table 6, Table 7, Table 8, Table 9 and Table 10).

- The variable <PARAM\_QC> has been renamed as <PARAM\_quality\_control> to be consistent with the name of the different QC attributes.
- The variable <PARAM\_UNCERTAINTY> has been renamed as <PARAM\_uncertainty>.
- The attribute <conventions> used to define a <PARAM\_quality\_control> variable has been renamed to <quality\_control\_conventions>.
- The attribute <quality\_control\_set> has been added to define a <PARAM\_quality\_control> variable.

### Other changes

- Some changes have been made to clarify use of standard names in section 6.1 -and Reference Table A. Only parameters that appear in the CF standard name table (<http://cf-pcmdi.llnl.gov/documents/cf-standard-names/>) can use the <standard\_name> attribute. Non-CF parameters (marked with the symbol "†" in Reference Table A) can only use the <long\_name> attribute for their description.
- In Reference Table A, the parameter RAIN has been renamed as RRATE.
- In Reference Table A, the parameter RAIT has been renamed as RAIN\_AMOUNT
- In Reference Table A, the parameter TURB has been added for turbidity.
- Some minor changes have been made to Table 1 and to the example found in section 3.3.3 -and in Appendix 1.
- The file naming convention (Appendix 2) has been updated to version (1.3).

## PREFACE to version 1.1

In response to comments received following our distribution of version 1.0 we have made a number of changes to the IMOS netCDF user's manual. These changes are summarised below:

### **Global Attributes**

- The global attribute <QC\_indicator> has been removed from the convention (Table 2).

**The attribute <contact> has been removed and replaced with two new attributes : <data\_centre\_email> and <author\_email> (**

- Table 2).
- The attribute <PI\_name> has been renamed more clearly as <principal\_investigator\_name> (Table 2).
- Use of the attribute <local\_time\_zone> is described more clearly in the text (Section 3.1.4.2 -).

**Description of the <keywords> attribute now specifies that GCMD keywords should be used where possible (**

- Table 2).

### **Variables**

- In version 1.0 we asked that variable names were all in capital letters. In version 1.1, variable names need not always be in capital letters (Section 3.3 -).
- An additional attribute was added to describe the <TIME> variable. This attribute is <calendar> and is used as defined in the CF-Convention (Eaton et al 2009) (Table 5).
- Two new variable attributes were added: <sensor\_height> and <observation\_type> (Table 9).
- The attribute <reference> has been renamed more clearly as <reference\_datum> (Table 6, Table 7, Table 8 and Table 9).
- A new section of the document describes the ancillary variables (QC and uncertainty) in detail, and when they should be used (Section 3.3.3 -).

- Use of the attributes QC\_set and QC\_indicator is described more clearly in the text in a new section on Quality Control (Section 3.3.5.3 -).
- A number of standardised parameter names/acronyms have been added to Reference Table A.

**Other changes**

- Some web links in the previous version were not working. These have been replaced in version 1.1 with working links.
- Additional references have been included in this version.
- The file naming convention (Appendix 2) has been updated to the most recent version (1.2).

# 1 - OVERVIEW

---

## 1.1 - About IMOS

IMOS is a distributed set of equipment and data-information services which collectively contribute to meeting the needs of marine climate research in Australia. The observing system provides data in the open oceans around Australia out to a few thousand kilometres as well as the coastal oceans. The IMOS Office coordinates the deployment of a wide range of equipment and assembles the data through 11 facilities distributed around the country. The data are made available to researchers through the electronic Marine information Infrastructure (eMII) located at the University of Tasmania. The IMOS infrastructure also contributes to Australia's role in international programs of ocean observing.

IMOS was planned through extensive consultation with the Australian marine research community through Nodes, including a Bluewater open ocean node and five regional nodes around the country.

IMOS is an initiative of the Australian Government being conducted as part of the National Collaborative Research Infrastructure Strategy. IMOS is coordinated nationally and managed by staff at the University of Tasmania.

## 1.2 - About this document

The main purpose of this document is to specify the format of the files that are used to distribute IMOS data, and to document the standards used therein. This includes naming conventions, or taxonomy, as well as metadata content.

The **IMOS** NetCDF convention manual was originally based on the one prescribed by the **OceanSITES** User's Manual, version 1.1. As both documents have evolved since, there might have now significant differences between them. The **OceanSITES** program is the global network of open-ocean sustained time series reference stations that have been implemented by an international partnership of researchers. More information about this project is available at <http://www.oceansites.org>.

The IMOS NetCDF convention manual also draws on documents that have been produced for the IMOS project (see References).

## 1.3 - IMOS data management structure and data access

The eMarine Information Infrastructure (eMII) will provide a single integrative framework for data and information management that will allow discovery and access of the data by scientists, managers and the public.

eMII activity can be summarised as follows:

- eMII will host, manage and archive data produced by the other IMOS facilities.
- eMII will provide the standards, protocols and systems to integrate the data and related information into a number of conformal frameworks, and will provide the tools to access and utilise the data.
- For some kinds of data, eMII will provide data products as web services and web features for processing, integration and visualisation of data.
- Where possible, eMII will integrate data from sources outside IMOS into IMOS data products and export IMOS data to international programs.

## 2 - IMOS DATA FORMAT

---

### **Network Common Data Form (netCDF)**

NetCDF is one of many file formats available for storing marine data. It is a relatively simple file format that is self-describing and portable. "Self-describing" means it contains data about the data (metadata), such as variable descriptions and units. "Portable" means that data in a dataset is represented in a form that can be accessed by computers with different methods of storing integers, characters and floating point numbers. It has a strong set of functional libraries that can be used to compress, subset and transform data. The netCDF software libraries and documentation are available online from Unidata<sup>1</sup>. Many netCDF manipulation and display software utilities are also available online.

NetCDF files contain the data as 'variables', which can be single numbers, vectors, or multi-dimensional arrays. Variables can be of data types: char (character), byte, short, int (integer), float or real, and double. NetCDF files contain data organised into a collection of named array variables along with named data file attributes. The format is widely applicable to many data types.

---

<sup>1</sup> <http://www.unidata.ucar.edu/software/netcdf/>

However, netCDF has some limitations. Some constraints exist on sizes of large variables. Also, the netCDF model does not support more than one unlimited dimension, nested data structures such as trees, nested arrays or other recursive structures. The Unidata NetCDF User's Guide thoroughly documents the many benefits and few limitations of NetCDF format (Rew et al 2008)<sup>2</sup>.

The IMOS NetCDF Convention has been written to be used when writing data files in netCDF Classic Format (version 3.6). Unidata released a netCDF-4 format in 2008. This format is more flexible than the classic format and offers additional features such as groups, compound types and variable length arrays. However, these files have a different underlying format to previous netCDF versions and cannot be read with any version of the netCDF library previous to 4.0. Unidata encourage the use of netCDF Classic Format to distribute data, for maximum portability (Rew et al 2008).

### **Common Data Language (CDL)**

Common Data Language (CDL) is a human readable text notation that is used to describe the netCDF objects. The netCDF utility *ncdump* can be used to convert netCDF object binary to CDL text. The netCDF utility *ncgen* creates a netCDF binary file from a well-formed CDL text file.

A CDL description of a netCDF dataset takes the form:

```
netCDF name {  
    dimensions: ....  
    variables: ....  
    data: ....  
}
```

Where the name is used only as a default in constructing file names by the *ncgen* utility. The CDL description consists of three optional parts, each introduced by the keywords 'dimensions', 'variables' and 'data'. NetCDF dimension declarations appear after the dimensions keyword, netCDF variables and attributes are defined after the variables keyword, and variable data assignments appear after the data keyword. CDL statements are terminated by a semicolon. Spaces, tabs and new lines can be used freely for readability. Comments in CDL follow the characters *'/'* on any line (Rew et al 2008).

A simple CDL example which describes IMOS sea surface temperature data collected from a ship of opportunity is shown in Table 1.

---

<sup>2</sup> <http://www.unidata.ucar.edu/software/netcdf/docs/netcdf>



**Table 1 A CDL (Common Data Language) description of a NetCDF file that contains data from the IMOS Ship of Opportunity Sea Surface Temperature Sub-Facility. CDL notation can be generated from NetCDF files using the NetCDF utility *ncdump*.**

```

netcdf IMOS_SOOP-SST_T_20071120T150000Z_VNSZ_FV01 { // example CDL for NetCDF notation
dimensions: // dimensions names are declared first
    TIME = 5;
    LONGITUDE = 3 ;
    LATITUDE = 2 ;
variables: // variable types, names, dimensions and attributes
    double TIME(TIME) ;
        TIME:long_name = "time" ;
        TIME:units = "days since 1950-01-01 00:00:00Z" ;
        TIME:standard_name = "time" ;
    float LONGITUDE(LONGITUDE) ;
        LONGITUDE:long_name = "longitude" ;
        LONGITUDE:units = "degrees_east" ;
        LONGITUDE:standard_name = "longitude" ;
    float LATITUDE(LATITUDE) ;
        LATITUDE:long_name = "latitude" ;
        LATITUDE:units = "degrees_north" ;
        LATITUDE:standard_name = "latitude" ;
    float TEMP(TIME, LATITUDE, LONGITUDE) ;
        TEMP:long_name = "Water Temperature in degrees C" ;
        TEMP:units = "Celsius" ;
        TEMP:standard_name = "sea_water_temperature" ;
        TEMP:_FillValue = 99999 ;
        TEMP:valid_min = -2.0 ;
        TEMP:valid_max = 40 ;

// global attributes: // METADATA
    :project = "Integrated Marine Observing System" ;
    :title = "IMOS_SOOP-SST_T_20071120T150000Z_VNSZ_FV01" ;
    :institution = "Enhanced Measurements from Ship of Opportunity (SOOP)" ;
    :Conventions = "CF-1.6, IMOS 1.3" ;
    :date_created = "2007-12-10T02:10:30Z" ;
    :source = "Ship observation" ;
    :keywords = "Oceans>Ocean Temperature>Water Temperature" ;
    :data_centre_email = "info@emii.org.au" ;
    :geospatial_lat_min = -35.0 ;
    :geospatial_lat_max = -36.0 ;
    :geospatial_lon_min = 151 ;
    :geospatial_lon_max = 152 ;

// data: // data assignments
    TIME = 0.5, 1.5, 2.5, 3.5, 4.5 ;
    LATITUDE = 54.2, 54.4, 54.6 ;
    LONGITUDE = 2.1, 2.5 ;
    TEMP = 34.5, 31.2, 23.7, 19.6, 35.8, 29.2, 24.4, 5.6, 7.2, 8.1, 18.6, 15.2, 13.1, 4.6, 3.7, 8.2, 9.7,
    34.2, 26.7, 28.7, 2.1, 3.4, 5.6, 7.8, 9.0, 10.2, 11.2, 11.6, 11.7, 11.8 ;
}

```

### NetCDF conventions

IMOS uses the NetCDF Climate and Forecast (CF) Metadata Conventions v1.6 (Eaton et al 2011) wherever possible. However, sometimes it was desirable to incorporate attributes or concepts from other conventions to the IMOS convention. We have made clear notations in this document where the IMOS netCDF convention diverges from the CF convention.

Non-CF  
attribute

In tables, attributes that have not been derived from the CF convention are marked in the left margin of the page as shown here.

CF conventions require conforming datasets to contain sufficient metadata that they are self-describing, in the sense that each variable in the file has an associated description of what it represents, including physical units if appropriate, and that each value can be located in space (relative to earth based coordinates) and time (Eaton et al 2011). The CF convention supplies a standard vocabulary and some metadata conventions.

### IMOS data format

The IMOS netCDF data format will enable the inclusion of standard terms for the short names of both coordinate and data variables (measurements). File names are created using an IMOS NetCDF filenaming convention (see Appendix 3). Coordinate variables, which describe the dimensions of a data set, are limited to a single set of 4-dimensional axes representing longitude, latitude, depth and time (X, Y, Z and T) dimensions in any single file. If data cannot all be put onto a single time axis, then separate files are created for these data.

An IMOS data file format will be flexible enough to contain all IMOS data variables.

IMOS NetCDF file conventions require that:

- Units are compliant with CF/COARDS/Udunits;
- The time parameter is encoded as recommended by COARDS and CF;
- Parameters are given standard names from the CF table
- Where time is specified as an attribute, the ISO8601 standard is used.

For more information on CF, COARDS, NetCDF, Udunits, and ISO8601 see:

**NetCDF:**        <http://www.unidata.ucar.edu/software/netcdf/docs/BestPractices.html>

**Udunits:**        <http://www.unidata.ucar.edu/software/udunits/>

**CF:**             <http://cf-pcmdi.llnl.gov/>

**COARDS:**       [http://ferret.wrc.noaa.gov/noaa\\_coop/coop\\_cdf\\_profile.html](http://ferret.wrc.noaa.gov/noaa_coop/coop_cdf_profile.html)

**ISO8601:**       [http://en.wikipedia.org/wiki/ISO\\_8601](http://en.wikipedia.org/wiki/ISO_8601)

## 3 - NETCDF FILE STRUCTURE

---

### 3.1 - Global Attributes

#### *3.1.1 -Definition*

The global attribute section of a NetCDF file contains metadata that describes the overall contents of the file and allows for data discovery. All fields should be human-readable and can be of either 'character' or 'numeric' type. IMOS recommends that all listed attributes be used and contain meaningful information unless there are technical reasons rendering this impossible (for example, information not available for historical data). Files must at least contain the attributes listed as "mandatory". Please contact eMII if this is proving difficult.

Global attributes can be thought of as conveying five kinds of information:

- What: What are the data in the dataset
- Where: The spatial coverage of the data
- When: The temporal coverage of the data
- Who: Who produced the data
- How: How were the data produced and made available

#### *3.1.2 -List of the core global attributes*

Core global attributes are mandatory from the point of view of either the CF or IMOS convention.

Table 2 lists all the core global attributes used to define an IMOS dataset.

Mandatory fields are marked with an asterisk ( \* ).

The "Type" values are **S** for string, **N** for numeric (byte, short, long, integer, float or double), **D** for the type of the data variable and **Q** for the type of the corresponding quality control data variable.

**Table 2 List of core mandatory global attributes for IMOS NetCDF files**

Name	Type	Example	Definition	
<b>What</b>				
Non-CF attribute	* project	S	project = "Integrated Marine Observing System"	The scientific project that produced the data. For data produced under the IMOS project, the field must be filled as shown in the example.
	* Conventions	S	Conventions = "CF-1.6,IMOS-1.3"	Name of the format convention used by the dataset. Possibility to include two different conventions if necessary. Here the followed CF and IMOS conventions must be present.
	* title	S	title = "Radar data from Tannum Sands station, Queensland"	Short description of the dataset
	* institution	S	institution = "ACORN"	Name of the institute or facility where the original data was produced
Non-CF attribute	* date_created	S	date_created = "2008-11-23T08:35:00Z"	The date on which the file was created. See <b>chapter 0</b> on time format below.
Non-CF attribute	* abstract	S	abstract = "....."	A paragraph describing the dataset: type of data contained in the dataset, how the data was created, the creator of the dataset, the

				project for which the data was created, the geospatial coverage of the data, the temporal coverage of the data. In some instances the abstract may be autogenerated from other netCDF fields. Please discuss this with eMII staff if you think autogeneration will be appropriate for your data.
Non-CF attribute	* keywords	S	keywords = "Oceans > Ocean Circulation > Ocean Currents , Oceans > Ocean Waves > Significant Wave Height ,..."	A comma separated list of key words and phrases. To be consistent with the MEST we recommend using the GCMD vocabulary (Olsen et.al., 2007). The GCMD keywords list can be downloaded from:  <a href="http://gcmd.nasa.gov/Resources/valids/archives/keyword_list.html">http://gcmd.nasa.gov/Resources/valids/archives/keyword_list.html</a>  Non-GCMD keywords may be used at your discretion
Non-CF attribute	* naming_authority	S	naming_authority = "IMOS"	This will always be "IMOS"
Non-CF attribute	<b>Where</b>			
	* geospatial_lat_min	N	geospatial_lat_min = 59.8	The southernmost latitude, a value between -90 and 90 decimal degrees North if not specified.
	* geospatial_lat_max	N	geospatial_lat_max = 59.8	The northernmost latitude, a value between -90 and 90 decimal degrees North if not specified.

	* geospatial_lon_min	N	geospatial_lon_min = -41.2	The westernmost longitude, a value between -180 and 180 decimal degrees East if not specified.
	* geospatial_lon_max	N	geospatial_lon_max = -41.2	The easternmost longitude, a value between -180 and 180 decimal degrees East if not specified.
	* geospatial_vertical_min	N	geospatial_vertical_min = 10.0	Minimum depth for measurements in metres if not specified.
	* geospatial_vertical_max	N	geospatial_vertical_max = 2000	Maximum depth for measurements in metres if not specified.
Non-CF attribute	<b>When</b>			
	* time_coverage_start	S	time_coverage_start = "2008-11-23T08:35:00Z"	Start date of the data in UTC. See chapter 0 on time format below
	* time_coverage_end	S	time_coverage_end = "2009-01-06T15:47:00Z"	Final date of the data in UTC. See chapter 0 on time format below
Non-CF attribute	<b>Who</b>			
	* data_centre	S	data_centre = "eMarine Information Infrastructure (eMII)"	Data centre in charge of the data management or party who distributed the resource
	* data_centre_email	S	data_centre_email = "info@emii.org.au"	Data Centre contact e-mail address
	* author	S	author = "Doe, John"	Name of the person responsible for the creation of the dataset. Convention is last name and then first name

Non-CF  
attribute

			separated by a comma.
* principal_investigator	S	principal_investigator = "Doe, John"	Name of the principal investigator in charge of the platform. Convention is last name and then first name separated by a comma.
<b>How</b>			
* citation	S	citation =  Integrated Marine Observing System. 2008, "Australian Acoustic Tagging and Monitoring System (AATAMS) data", <a href="http://imos.org.au/emii_aatams.html">http://imos.org.au/emii_aatams.html</a> , accessed 20 Dec 2008.	The citation to be used in publications using the dataset should follow the format:  "IMOS. [year-of-data-download], [Title], [Data access URL], accessed [date-of-access]".
* acknowledgement	S	acknowledgement =  "Data was sourced from the Integrated Marine Observing System (IMOS) – IMOS is supported by the Australian Government through the National Collaborative Research Infrastructure Strategy (NCRIS) and the Super Science Initiative (SSI)."	Any users (including re-packagers) of IMOS data are required to clearly acknowledge the source of the material in this format.
* distribution_statement	S	distribution_statement =  Data may be re-used, provided that related metadata explaining the data has been reviewed by the user, and the data is appropriately	Statement describing data distribution policy:  Re-packagers of IMOS data should include a statement that information about data quality and lineage is available from the metadata record and



		acknowledged. Data, products and services from IMOS are provided "as is" without any warranty as to fitness for a particular purpose.	a statement that data, products and services from IMOS are provided "as is" without any warranty as to fitness for a particular purpose.
--	--	---------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------

### 3.1.3 -List of the optional global attributes

Table 3 below lists some of the optional global attributes than can be used by any facility to describe an IMOS NetCDF dataset.

For some example of facility oriented optional global attributes definitions, see appropriate Appendix.

The "Type" values are **S** for string, **N** for numeric (byte, short, long, integer, float or double), **D** for the type of the data variable and **Q** for the type of the corresponding quality control data variable.

**Table 3 List of optional global attributes for IMOS NetCDF files**

Name	Type	Example	Definition	
<b>What</b>				
Non-CF attribute	date_modified	S	date_modified = "2008-12-23T20:35:00Z"	The date on which the data was modified. See <b>chapter 0</b> on time format below. If this attribute is used for the first time or modified, a new entry needs to be added to the "history" attribute.
	history	S	history = "....."	Provides an audit trail for modifications to the original data. It should contain a separate line for each modification, with each line beginning with a timestamp and including user name, modification name and modification arguments.

	comment	S	comment = "....."	Miscellaneous information about the data or methods used to produce it. Any free-format text is appropriate
	source	S	source = "Radar Observation"	Method of production of the original data
Non-CF attribute	instrument	S	instrument = "WETLABS WQM"	Make and model of the instruments from which the data has been collected.
	references	S	references = "http://www.imos.org.au"	Published or web-based references that describe the data or the methods used to produce the data. Include a reference to IMOS and a project-specific reference if appropriate. Multiple references should be separated with a semicolon ";".
Non-CF attribute	netcdf_version	N	netcdf_version = 3.6	NetCDF version used for the dataset
Non-CF attribute	quality_control_set	N	quality_control_set = 1	Definition of the Quality control set used for the data, if the same for all variables  See IMOS Reference Table B
Non-CF attribute	site_code	S	site_code = "....."	Name of the site within IMOS project.
Non-CF attribute	platform_code	S	platform_code = "TAN"	Platform unique code within IMOS project. The platform codes are listed in Naming Reference Table 3 in Appendix 3 "File naming convention for netCDF files".

Non-CF attribute	cdm_data_type	S	cdm_data_type = "Station"	<p>The "cdm_data_type" attribute gives the Unidata CDM (Common Data Model) data type used by THREDDS. E.g. "Point", "Trajectory", "Station", "Radial", "Grid", "Swath".</p> <p>More information on <a href="http://www.unidata.ucar.edu/projects/THREDDS/CDM/CDM-TDS.htm">http://www.unidata.ucar.edu/projects/THREDDS/CDM/CDM-TDS.htm</a></p>
Non-CF attribute	metadata	S	metadata = " http://....."	<p>URL to the metadata record corresponding to the netCDF file.</p> <p>eMII are considering adding this information to the data files as part of eMII data processing. Facilities would not be required to complete these fields when submitting data.</p>
Non-CF attribute	sensorML	S	sensorML = " http://....."	<p>Link to the sensorML record corresponding to the netCDF file. eMII are considering adding this information to the data files as part of eMII data processing. Facilities would not be required to complete these fields when submitting data.</p>
	institution_address	S	institution_address = "Oceanography laboratory, School of Mathematics and Statistics, University of New South Wales, Sydney NSW 2052"	<p>Address of the institute or facility where the original data was produced.</p>

	institution_postal_address	S	institution_postal_address = "University of New South Wales, Sydney NSW 2052"	Postal address of the institute or facility where the original data was produced.
Non-CF attribute	file version	S	file_version = "Level 0 – Raw data"	Information about the file version of the file. Three levels are possible at the moment: <ul style="list-style-type: none"> <li>- Level 0 – Raw data</li> <li>- Level 1 – Quality Controlled data</li> <li>- Level 2 – Derived product</li> </ul>
Non-CF attribute	file_version_quality_control	S	file_version_quality_control = "Data in this file has not been quality controlled"	Description of the Quality Control procedure applied to the data. See chapter 3.1.5 - for more information and examples.
Non-CF attribute	<b>Where</b>			
	geospatial_lat_units	S	geospatial_lat_units = "degrees_north"	Units used for geospatial_lat_min/max attributes.
	geospatial_lon_units	S	geospatial_lon_units = "degrees_east"	Units used for geospatial_lon_min/max attributes.
	geospatial_vertical_units	S	geospatial_vertical_units = "metres"	Units used for geospatial_vertical_min/max attributes.
Non-CF attribute	<b>When</b>			
	local_time_zone	N	local_time_zone = 10	Local time zone. See chapter 0 on time format below. If local time does not fall into one zone for the full dataset, do not use this attribute.

Non-CF attribute	<b>Who</b>			
	author_email	S	author_email = "info@emii.org.au"	NetCDF file author contact e-mail address
	principal_investigator_email	S	principal_investigator_email = "john.doe@utas.edu.au"	Principal Investigator e-mail address
	institution_references	S	institution_references = "http://imos.org.au/emii.html"	References that describe the data provider institution, the place to find all information on the dataset (web-based, i.e. give URLs).  Multiple references should be separated with a semicolon ";".

### 3.1.4 - Time formats

Time consists of three components:

- The actual time as hours, minutes and seconds
- The time zone of the location at which the measurement was made
- The reference point against which the time is measured

#### 3.1.4.1 - Actual time

All time will be recorded in hours, minutes, seconds and decimal fractions of seconds relative to UTC that is Universal Time Coordinate or the old GMT.

Whenever time information is given in the global attributes, it ought to be a string of the format: "YYYY-MM-DDThh:mm:ssZ" (i.e. year – month – day T hour : minute : second Z)

If higher resolution than seconds is needed, any number of decimal digits (".s") for the seconds is acceptable: "YYYY-MM-DDThh:mm:ss.sZ"

Time will be recorded using the international standard ISO 8601 (International Organization for Standardization, 2009). Examples of the time format are shown below.

2005-10-24T08:00:00Z

2008-01-01T22:50:02.03Z

#### **3.1.4.2 - Time zone**

The time zone value gives the local time which is important in considering many biological processes and phenomena. For example, we may measure time as hours, minutes and seconds from a reference such as UTC but to be able to relate that to local diurnal processes we also need to know the local time zone.

The local time zone will be recorded as the hours plus or minus from the longitude meridian.

Examples of the time format are shown below:

2008-10-24T08:00:00Z (UTC)

2008-10-24T18:00:00+10 (Local)

The value (eg. +10) should be included in the global attribute `local_time_zone`.

Corrections from local to UTC time for Australian time zones can be found online at:

<http://www.timeanddate.com/worldclock/timezone.html?n=396>

The global attribute `'local_time_zone'` should be used only when all data points in a dataset are from the same local time zone. If time zone changes during the dataset (e.g. moving point measurements on a ship of opportunity) then do not use this global attribute. Instead, advanced users may choose to create a user-defined variable called `'local_time_zone'`. If local time zone is not defined in the dataset, it will be calculated by data users from the lat/long coordinate and UTC time variables.

### *3.1.5 -File versioning*

Two attributes `<file_version>` and `<file_version_quality_control>` define the file version of the NetCDF file and describe the Quality Control (QC) procedure used for the dataset.

Three possibilities are available for these two attributes:

Global attribute <file_version>	Examples of use of the global attribute <file_version_quality_control>
Level 0 – Raw data	Data in this file has not been quality controlled
Level 1 – Quality Controlled data	Data in this file has been through the BOM quality control procedure (Reference Table F). Every data point in this file has an associated quality flag.
level 2 – Derived product	All data in this file has been through the quality control procedure (Reference Table F) and was classed Z (passes all tests).

### *3.1.6 -Global Attributes added by the user*

The global attributes listed in the table in the chapter 3.1.2 - are most important to define a dataset as clearly as possible. However, this list will not in all cases be exhaustive and eMII requests that other meaningful global attributes be used where necessary.

It is possible to add global attributes to meet specific facility needs. New attributes will need to be self defined, including a description and an example of how it is used. User-defined global attributes should be added to the existing list (appropriate appendix section) in the next version of the IMOS NetCDF User's manual.

An example of an 'user defined' global attribute and supporting information is below:

This example can be used by the ACORN facility to illustrate the kind of data and the type of radar used to produce the data. The prefix "ssr" added to each attribute means "sea surface radar".

ssr\_Data\_Type = "Range\_Time\_Series"

ssr\_Radar = "Helzel/WERA"

## 3.2 - Data File Dimensions

NetCDF file dimensions provide information on the number and size of the data variables. IMOS allows a single variable for each of the data dimensions, i.e. time, depth, latitude and longitude. There may only be one unlimited dimension, i.e. as many instances of this variable as needed, for a limited number of

coinciding variables. Other dimensions may be greater than 1, but must be defined and may not be unlimited. Coordinate types other than latitude, longitude, depth and time are allowed.

The example in Table 4 allows for measurements at an unlimited number of time steps, at five different depths and one latitude, longitude, position, frequency and direction.

Requirements are described further in the section on coordinate variables (3.3.1 -).

**Table 4 An example list of Dimensions for an IMOS NetCDF file**

Name	Example	Comment
TIME	TIME = unlimited	Number of time steps
DEPTH	DEPTH = 5	Number of depth levels
LATITUDE	LATITUDE = 1	Dimension of the latitude coordinate variable
LONGITUDE	LONGITUDE = 1	Dimension of the longitude variable
POSITION	POSITION = 1	Dimension of the POSITION variable
FREQUENCY	FREQUENCY = 1	Number of frequency levels
DIRECTION	DIRECTION = 1	Number of direction levels

### 3.3 - Variables

NetCDF variables include data measured by instruments, parameters derived from the primary measurements and coordinate variables, which may be nominal values such as values for depth for instruments that do not directly record depth. Defined variable names are listed in Reference Table A. Each variable has a specific set of attributes, some of which are mandatory.

The "Type" values are **S** for string, **N** for numeric (byte, short, long, integer, float or double), **D** for the type of the data variable and **Q** for the type of the quality control data variable.



This section will be divided into 5 different sub-sections as listed below:

- The coordinate variables
- The data variables
- Quality control 'sets'
- Defining uncertainties in data measurement
- An example of a NetCDF header.

### *3.3.1 -Coordinate variables*

The coordinate variables orient the data in time and space. For this purpose, they have an "axis" attribute defining that they point in X, Y, Z and T dimensions. The X and Y of course represent horizontal space while for oceanography Z is depth or height and T is time.

The use of a common set of spatial and temporal units and measures is the basic requirement to be able to integrate the various data collected by the IMOS project.

#### **3.3.1.1 - TIME**

All time will be recorded in fractions of days from a reference time relative to UTC that is Universal Time Coordinate or the old GMT.


Time consists of three components:

- The actual time as the number of days since the reference time
- The time zone of the location at which the measurement was made
- The reference point against which the time is measured

The third component is used to define the reference point in the attribute named "units". eMII suggests that all the IMOS data should use the ARGO reference time of 1<sup>st</sup> of January of 1950. The value will be stored as the number of days since this reference time.

To identify the time variable, three parameters are used: Type, Name and Dimension.

Example : Double TIME(TIME)



The following table presents the different attributes used to represent the time variable. Mandatory fields are marked with an asterisk ( \* )

**Table 5 List of attributes defining the TIME variable for IMOS NetCDF files**

Attributes	Type	Example	Comment
* standard_name	S	standard_name="time"	A standard name that references a description of a variable's content in the standard name table
* long_name	S	long_name = " time "	A descriptive name that indicates a variable's content. This name is not standardized.
* units	S	units = "days since 1950-01-01 00:00:00Z"	Units of a variable's content.  Date and time (UTC) of the measurement in days since 1950-01-01 00:00:00  Example :Noon, Jan 2, 1950 is stored as 1.5  July 25, 2001, 19:14:00 is stored as 18833.8013889  Please contact eMII if you require help with this conversion: info@emii.org.au

	* axis	S	axis = "T"	Identifies time axes
	* valid_min	N	valid_min = 0	Smallest valid value of a variable
	* valid_max	N	valid_max = 90000.0	Largest valid value of a variable
	_FillValue	D	_FillValue = 999999.0	A value used to represent missing or undefined data <sup>3</sup> . Actually non-CF for dimensions.
	* calendar	S	calendar = "gregorian"	Calendar used for encoding time axes. See Eaton et. al. 2009 for clarification.
	comment	S	comment = "....."	Miscellaneous information about the data or methods used to produce it.
Non-CF attribute	quality_control_set	N	quality_control_set = 1	A value representing the Quality control set used to the data. See IMOS Reference Table B.
Non-CF attribute	quality_control_indicator	Q	quality_control_indicator = <X>	This attribute may be used if the quality of 'time' data is constant throughout the dataset. This allows user to quickly assess if all the data is good, without looking at the _quality_control variable. However, the quality control variable  TIME_quality_control <b>must</b> still be defined as discussed in section 3.3.5 -. See IMOS Reference Tables C to F.

<sup>3</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 999999.

Non-CF attribute	uncertainty	N	uncertainty = <Z>	<Z> : Overall measurement uncertainty. Choose appropriate value. See section 3.3.6 -.
Non-CF attribute	local_time_zone	N	local_time_zone =+10	A value used to represent the local time zone if it remains constant throughout the dataset.

Example :

```

Double TIME(TIME) ;
    TIME:long_name = "time" ;
    TIME:standard_name = "time" ;
    TIME:units = "days since 1950-01-01 00:00:00Z" ;
    TIME:axis = "T" ;
    TIME:valid_min = 0 ;
    TIME:valid_max = 90000.0 ;
    TIME:_FillValue = 999999.0 ;
    TIME:calendar = "gregorian"
    TIME:quality_control_set = 1
    TIME:quality_control_indicator = 1
    TIME:uncertainty = 0.003
    TIME:local_time_zone = +10
    
```

### 3.3.1.2 - Location (X- Y horizontal Space)

With the advent of GPS systems, it is now possible to measure position in space easily and accurately.

The location will be measured by GPS or equivalent as Latitude/Longitude in Decimal degrees using the WGS84 projection with locations south of the equator having negative Latitude and locations west of zero degrees of Longitude having negative Longitude.

Table 6 and Table 7 present the different attributes used to define the variables LATITUDE and LONGITUDE.

3.3.1.2.1 - *LATITUDE*

**Table 6 List of attributes that define the LATITUDE variable for IMOS NetCDF files**

Attributes	Type	Example	Comment
* standard_name	S	standard_name = "latitude"	A standard name that references a description of a variable's content in the standard name table  Latitude of the measurements
* long_name	S	long_name = "latitude"	A descriptive name that indicates a variable's content. This name is not standardized.
* units	S	units = "degrees_north"	Units: degrees north ; southern latitudes are negative  Example : -44.4991 for 44 29' 56.76" S
* axis	S	axis = "Y"	Identifies Y axes
* valid_min	N	valid_min = -90	Smallest valid value of a variable
* valid_max	N	valid_max = 90	Largest valid value of a variable
_FillValue	D	_FillValue = 999999.0	A value used to represent missing or undefined data <sup>4</sup> . Actually non-CF for dimensions.
comment	S	comment = "....."	Miscellaneous information about the data or methods used to produce it.

---

<sup>4</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 99999.

Non-CF attribute	quality_control_set	N	quality_control_set = 1	A value representing the Quality control set used to the data. . See IMOS Reference Table B.
Non-CF attribute	quality_control_indicator	Q	quality_control_indicator = <X>	This attribute may be used if the quality of 'latitude' data is constant throughout the dataset. This allows user to quickly assess if all the data is good, without looking at the _quality_control variable. However, the variable LATITUDE_quality_control <b>must</b> still be defined. See IMOS Reference Tables C to F.
Non-CF attribute	uncertainty	N	uncertainty = <Z>	<Z> : Overall measurement uncertainty. Choose appropriate value. See section 3.3.6 -.
Non-CF attribute	* reference_datum	S	reference_datum = "geographical coordinates, WGS84 projection"	Text description of the geographic reference datum for the variable

Example:

```
Float LATITUDE(LATITUDE) ;
    LATITUDE:long_name = "latitude" ;
    LATITUDE:standard_name = "latitude" ;
    LATITUDE:units = "degrees_north" ;
    LATITUDE:axis = "Y" ;
    LATITUDE:valid_min = -90 ;
    LATITUDE:valid_max = 90 ;
    LATITUDE:_FillValue = 999999.0 ;
    LATITUDE:quality_control_set = 1
    LATITUDE:quality_control_indicator = 1
    LATITUDE:uncertainty = 0.001
    LATITUDE:reference-datum = "geographical coordinates, WGS84 projection"
```

3.3.1.2.2 - *LONGITUDE*

**Table 7 List of attributes to define the LONGITUDE variable for IMOS NetCDF files**

Attributes	Type	Example	Comment
* standard_name	S	standard_name = "longitude "	A standard name that references a description of a variable's content in the standard name table  Longitude of the measurements
* long_name	S	long_name = "longitude"	A descriptive name that indicates a variable's content. This name is not standardized.
* units	S	units = "degrees_east"	Units: degrees east ; western longitudes are negative  Example : -16.7222 for 16 43' 19.92" W
* axis	S	axis = " X "	Identifies X axes
* valid_min	N	valid_min = -180	Smallest valid value of a variable
* valid_max	N	valid_max = 180	Largest valid value of a variable
_FillValue	D	_FillValue = 999999.0	A value used to represent missing or undefined data <sup>5</sup> . Actually non-CF for dimensions.
comment	S	comment = " ....."	Miscellaneous information about the data or methods used to

---

<sup>5</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 99999.

			produce it.
Non-CF attribute	quality_control_set	N	quality_control_set = 1 A value representing the Quality control set used to the data. . See IMOS Reference Table B.
Non-CF attribute	quality_control_indicator	Q	quality_control_indicator = <X> This attribute may be used if the quality of 'longitude' data is constant throughout the dataset. This allows user to quickly assess if all the data is good, without looking at the _quality_control variable. However, the variable LONGITUDE_quality_control <b>must</b> still be defined.. See IMOS Reference Tables C to F.
Non-CF attribute	uncertainty	N	uncertainty = <Z> <Z> : Overall measurement uncertainty. Choose appropriate value. See section 3.3.6 -.
Non-CF attribute	* reference_datum	S	reference_datum = "geographical coordinates, WGS84 projection" Text description of the geographic reference datum for the variable

Example:

```
Float LONGITUDE(LONGITUDE) ;
    LONGITUDE:long_name = "longitude" ;
    LONGITUDE:standard_name = "longitude" ;
    LONGITUDE:units = "degrees_east" ;
    LONGITUDE:axis = "X" ;
    LONGITUDE:valid_min = -180 ;
    LONGITUDE:valid_max = 180 ;
    LONGITUDE:_FillValue = 999999.0 ;
    LONGITUDE:quality_control_set = 1
    LONGITUDE:quality_control_indicator = 1
```



LONGITUDE:uncertainty = 0.001

LONGITUDE:reference\_datum = "geographical coordinates, WGS84 projection"

### 3.3.1.3 - Vertical coordinate

Any vertical coordinate must be referenced from a point or datum (attribute `reference_datum`) and defined with a direction (attribute `positive`). Four datums are recognised: Mean Sea Level (MSL) sea surface, sea bottom and sensor. The time and location of the instrument will need to be included to allow for tide corrections. When necessary, any vertical measurement should be converted into one of the acceptable datums. Two directions are recognised: up or down.

#### 3.3.1.3.1 - DEPTH

Depth will be measured as positive values with increasing depth as measured from a reference point or datum. All depth measurements will be recorded as an offset or a distance from a reference datum, such as metres below the surface or metres below MSL.

Depth should be measured in metres or other SI units. Depth measured as pressure should be converted to metres and not left as pressure; if the pressure measurements are required these should be recorded as a separate data stream. It is not permissible to label a pressure measurement as "depth"; a depth measurement will always be in metres.

Table 8 presents the different attributes used to describe the DEPTH variable.

**Table 8 List of attributes that define the DEPTH variable for IMOS NetCDF files**

Attributes	Type	Example	Comment
* <code>standard_name</code>	S	<code>standard_name = "depth"</code>	A standard name that references a description of a variable's content in the standard name table  Depth of each measurement
* <code>long_name</code>	S	<code>long_name = "depth"</code>	A descriptive name that indicates a variable's content. This name is not standardized.

	* units	S	units = " metres "	Example : 513 for a measurement 513 metres below reference datum, e.g. MSL
	* axis	S	axis = " Z "	Identifies Z axes
	* positive	S	positive = "down "	Direction of increasing vertical coordinate value.  Z axes may be positive = "up" (atmospheric) or negative = "down" (oceanic)
	* valid_min	N	valid_min = 0	Smallest valid value of a variable
	* valid_max	N	valid_max = 12000	Largest valid value of a variable
	_FillValue	D	_FillValue = -99999.0	A value used to represent missing or undefined data <sup>6</sup> . Actually non-CF for dimensions.
	comment	S	comment = " ....."	Miscellaneous information about the data or methods used to produce it.
Non-CF attribute	quality_control_set	N	quality_control_set = 1	A value representing the Quality control set used to the data. . See IMOS Reference Table B.
Non-CF attribute	quality_control_indicator	Q	quality_control_indicator = <X>	This attribute may be used if the quality of 'depth' data is constant throughout the dataset. This allows user to

<sup>6</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 99999.

			quickly assess if all the data is good, without looking at the <code>_quality_control</code> variable. However, the variable <code>DEPTH_quality_control</code> <b>must</b> still be defined.. See IMOS Reference Tables C to F.
Non-CF attribute	* <code>uncertainty</code>	N	<code>uncertainty = &lt;Z&gt;</code>  <Z> : Overall measurement uncertainty. Choose appropriate value.  See section 3.3.6 -.
Non-CF attribute	* <code>reference_datum</code>	S	<code>reference_datum = "Mean Sea Level (MSL)"</code>  Text description of the reference datum for the variable

Example:

```
Float DEPTH(DEPTH) ;
    DEPTH:long_name = "depth of each measurement" ;
    DEPTH:standard_name = "depth" ;
    DEPTH:units = "metres" ;
    DEPTH:axis = "Z" ;
    DEPTH:positive = "down" ;
    DEPTH:valid_min = 0 ;
    DEPTH:valid_max = 12000 ;
    DEPTH:_FillValue = -999999.0 ;
    DEPTH:quality_control_set = 1
    DEPTH:quality_control_indicator = 1
    DEPTH:uncertainty = 0.001
    DEPTH:reference_datum = "Mean Sea Level (MSL)"
```

### 3.3.1.3.2 - HEIGHT

Height will be measured as positive values with increasing height as measured from a reference point or datum.

All height measurements will be recorded as an offset or a distance from a reference datum, such as metres above sea bottom or metres above sensor.

Height should be measured in metres or other SI units.


### 3.3.2 -Data variables

The variable names are standardized in IMOS Reference Table A. For example, TEMP represents the sea water temperature and PSAL represent the sea water salinity. The data variables should begin with a letter and be composed of letters, digits and underscores.

To identify a variable, three parameters are used: type, Name and Dimension. In data variable definitions, the dimensions (TIME, DEPTH, LATITUDE, LONGITUDE) must be used in this order (if present) as they appear in CDL. When “extra” dimensions are used, such as with model runs, they should appear to the left of the standard dimensions in a variable definition.

In some cases, two instruments may measure the same variable (e.g. wind speed measured by two anemometers mounted on the same vessel). In these cases, the second instance of a variable should be identified with the suffix ‘\_2’. When wind speed is measured twice the variables would be defined as WSPD and WSPD\_2. Several variable attributes can be used to specify the differences, including comments, descriptive attributes (sensor\_depth, sensor\_height) and long names. Two anemometers might be distinguished in their long names as wind\_speed\_starboard and wind\_speed\_port.

Example for the sea water temperature:

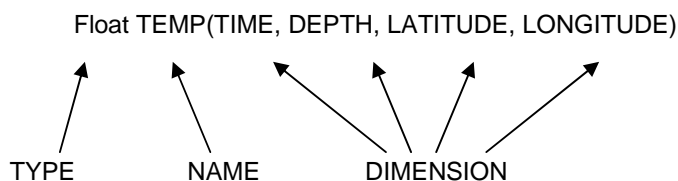

The following table presents the different attributes used to represent a specific variable. Mandatory fields are marked with an asterisk ( \* )

**Table 9 List of data variables attributes for IMOS NetCDF files**

Attributes	Type	Example	Comment
standard_name	S	standard_name = "sea_surface_temperature"	A CF standard name that references a description of a variable's content in the standard name table. See Reference Table A.
* units	S	units = "Celsius"	Units
* _FillValue	D	_FillValue = 999999	A value used to represent missing or undefined data <sup>7</sup>
* long_name	S	long_name = " Surface temperature in degree Celsius"	A descriptive name that indicates a variable's content. This name is the same as the CF standard name (if that exists). Otherwise it is the IMOS long name given in Reference Table A. Please contact eMII regarding any parameters that don't appear in the table
valid_min	N	valid_min = -2.0	Minimum value for valid data
valid_max	N	valid_max = 40	Maximum value for valid data
add_offset	N	add_offset = 25	If present for a variable, this number is to be added to the data after it is read by an application. If both scale_factor and add_offset attributes are

<sup>7</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 99999.

			present, the data are first scaled before the offset is added.	
	scale_factor	N	scale_factor = 0.01	If present for a variable, the data are to be multiplied by this factor after the data are read by an application.
Non-CF attribute	applied_offset	N	applied_offset = -10.1325	if present for a variable, this offset has been added to the original data to correct it.
Non-CF attribute	original_units	S	original_units = "....."	Original units of a variable's content
Non-CF attribute	original_name	S	original_name = "....."	Original name of a variable
Non-CF attribute	sensor_serial_number	S	sensor_serial_number = "....."	Serial number of the sensor which collected the data of this variable.
	comment	S	comment = "....."	Miscellaneous information about the data or methods used to produce it
	history	S	history = "....."	List of application that have modified the original data
	references	S	references = "....."	References that describe the data or methods used to produce it. Multiple references should be separated with a semicolon.
	ancillary_variables	S	ancillary_variables = "TEMP_quality_control"	Identifies a variable that contains closely associated data, e.g. the measurement uncertainties of instrument data. See section 3.3.3 -.

Non-CF attribute	sensor_depth	N	sensor_depth = 0	Nominal sensor depth(s) in metres counting positive as per the attribute DEPTH:positive
Non-CF attribute	sensor_height	N	sensor_height = 2	Nominal sensor height(s) in metres counting positive as per the attribute DEPTH:positive
Non-CF attribute	observation_type	S	observation_type = "measured"	Type of observation. If for example, the variable is measured or calculated.
Non-CF attribute	uncertainty	N	uncertainty = 0.001	Overall measurement uncertainty, if constant. Cf paragraph 3.3.6 -.
Non-CF attribute	accuracy	N	accuracy = 0.01	Nominal sensor accuracy. Cf. paragraph 3.3.6 -.
Non-CF attribute	precision	N	precision = 0.01	Nominal sensor precision. Cf paragraph 3.3.6 -.
Non-CF attribute	resolution	N	resolution = 0.01	Nominal resolution of this data parameter. Cf paragraph 3.3.6 -.
	cell_methods	S	cell_methods = "point"	Records the method used to derive data that represents cell values. See section 6.3 - and Reference Table G for more information
	reference_datum	S	reference_datum = "....."	Text description of the reference datum for the variable
Non-CF attribute	quality_control_set	N	quality_control_set = 1	A value representing the Quality control set used to the data. See IMOS

			Reference Table B.
Non-CF attribute	quality_control_indicator	Q	quality_control_indicator = <X>  If the data quality is constant, this additional attribute is used. The variable <PARAM_quality_control> still need to be defined. See IMOS Reference Tables C to F.

### 3.3.3 - Ancillary variables

When one data variable provides metadata about the individual values of another data variable it may be desirable to express this association by providing a link between the variables. For example, instrument data may have associated measures of uncertainty; data points may have associated quality control flags. The attribute "ancillary\_variable" is used to express these types of relationships.

The use of ancillary variables in the context of data Quality Control and uncertainty are described in sections 3.3.5 - and 3.3.6 -.

Example:

```
float TEMP(TIME, DEPTH, LATITUDE, LONGITUDE) ;
    TEMP:long_name = "Water Temperature in degrees C" ;
    TEMP:units = "Celsius" ;
    TEMP:standard_name = "sea_water_temperature" ;
    TEMP:_FillValue = 99999 ;
    TEMP:ancillary_variables = "TEMP_quality_control TEMP_uncertainty";
byte TEMP_quality_control(TIME, DEPTH, LATITUDE, LONGITUDE) ;
    TEMP_quality_control:standard_name = "sea_water_temperature status_flag" ;
    TEMP_quality_control:convention = "IMOS standard set using IODE flags";
    TEMP_quality_control:_FillValue = -10 ;
    TEMP_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
    TEMP_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
missing_value";
float TEMP_uncertainty(TIME, DEPTH, LATITUDE, LONGITUDE) ;
    TEMP_uncertainty:long_name = "Uncertainty of water temperature" ;
    TEMP_uncertainty:units = "Celsius" ;
    TEMP_uncertainty:standard_name = "sea_water_temperature standard_error" ;
    TEMP_uncertainty:_FillValue = 99999 ;
```



### *3.3.4 - Data variable attributes added by user*

User defined data variables will be included in future versions of the NetCDF document. This document will be revised regularly and new user-defined data variable attributes incorporated into Table 9.

### *3.3.5 - Quality control (QC)*

#### **3.3.5.1 - Introduction**

Quality control involves some sort of assessment of the data to identify data points or even data sets which have errors that limit their use. The basic approach used by IMOS is to keep all of the data but to flag data or data sets that do not meet the quality assessment standards of data collectors / principal investigators. Quality Control is a complex area and one that will be implemented in a more sophisticated manner as the project progresses. We present here the basic requirements for QC of IMOS data.

Most IMOS facilities are currently using a quality control procedure. eMII will not proscribe changes to procedures that are already in use. On the other hand, it is appropriate that all IMOS facilities use the same convention to qualify their quality control procedures: for example, the naming of the QC variables or the naming of possible variable attributes.

This section will present the different Quality Control procedures currently used within the IMOS project. It will also present the different attributes and the variables available to define a quality control procedure.

#### **3.3.5.2 - Quality Control sets used by the IMOS project**

The global attribute **quality\_control\_set** will enable users to define which set of Quality Control flags was applied to the dataset. Please see Reference Table B. Additional QC sets may be added to this table in future versions of this document.

The first set of Quality Control flags in Reference Table B corresponds to an IMOS-wide standard set of QC flags, the IODE flags (See Reference Table C).

According to Table B, a value equal to 2 will define that the ARGO quality control procedure was used for the dataset.



* quality_control_set	N	quality_control_set = 1	A value representing the Quality Control set used to the data.. See IMOS reference Table B
* quality_control_conventions	S	quality_control_conventions = "IMOS standard set using the IODE flags"	Quality Control convention used, in this case the chosen QC set. See IMOS reference table B.
_FillValue	D	_FillValue = -1	Value used to represent missing QC flags <sup>8</sup>
* valid_min	N	valid_min = 0	The minimum value for valid data
* valid_max	N	valid_max = 9	The maximum value for valid data
* flag_values	D	flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9	The possible value for each data
* flag_meanings	S	flag_meanings = no_qc_performed good_data probably_good_data bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used	One meaning is associated to each flag value :

---

<sup>8</sup> Some users will create netCDF files with Matlab which contain a "not-a-number" (NaN) fill value. We ask that this NaN value be replaced with a float value e.g. \_FillValue of 99999.

		interpolated_value	
		missing_value	

Example:

```
Byte TEMP_quality_control(TIME, DEPTH, LATITUDE, LONGITUDE) ;
    TEMP_quality_control:long_name = "quality flag for sea_surface_temperature" ;
    TEMP_quality_control:standard_name = "sea_surface_temperature_status_flag" ;
    TEMP_quality_control:quality_control_set = 1 ;
    TEMP_quality_control:quality_control_conventions = "IMOS standard set using IODE flags"
    TEMP_quality_control:_FillValue = -1 ;
    TEMP_quality_control:valid_min = 0 ;
    TEMP_quality_control:valid_max = 9 ;
    TEMP_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
    TEMP_quality_control:flags_meanings =
        no_qc_performed      good_data      probably_good_data
        bad_data_that_are_potentially_correctable      bad_data
        value_changed      not_used      not_used      interpolated_value
        missing_value;
```

### 3.3.5.5 - QC coordinate variables

The coordinate variables (TIME, DEPTH, LATITUDE and LONGITUDE) utilise the same quality control variables as the data variables. If the quality control values are constant throughout the dataset, the information may also be summarised using the quality\_control\_indicator attribute.

To identify a QC coordinate variable, three parameters are used: Type, Name and Dimension.

Example for the TIME, LATITUDE, LONGITUDE and DEPTH variables:

```
Byte TIME_quality_control(TIME);
Byte LATITUDE_quality_control(LATITUDE)
Byte LONGITUDE_quality_control(LONGITUDE);
Byte DEPTH_quality_control(DEPTH)
```

### *3.3.6 -Uncertainty*

#### **3.3.6.1 - Introduction**

The term uncertainty is here defined as “the parameter, associated with the result of a measurement that characterises the dispersion of the values that could reasonably be attributed to the measurand” (Underwood, 2008).

The document “IMOS Data Streams and their Uncertainties” (Underwood, 2008) contains a calculation or estimation of the uncertainty for each data stream that will be provided by IMOS. When this document was created, a small number of data streams were still to be agreed upon, rendering it unfeasible to quantify errors for these streams. As the information on these data streams becomes available, it will be included in this document.

The document “IMOS Data Streams and their Uncertainties” is divided into three sections. The first section consists of a table that lists the uncertainty for each IMOS data stream, grouped by the parameter being measured. The second section is arranged by individual IMOS facility. It contains more information on the uncertainties, the instruments to be used and how the uncertainties are calculated and supported. The third section contains information relating to classes of instruments that are used across several IMOS facilities as well as some general comments on calibration issues.

A copy of this document is available from the IMOS website : [http://imos.org.au/facility\\_manuals.html](http://imos.org.au/facility_manuals.html)

#### **3.3.6.2 - Implementation in IMOS**

If the overall measurement uncertainty for a variable <PARAM> is reasonably well-known, it must be provided in the attributes. If it is constant it should be provided in the attribute <PARAM>:uncertainty. If not constant it should be provided in a variable of its own, <PARAM\_uncertainty>.. The standard name for this variable is formatted as: “<parameter\_standard\_name> standard\_error” (e.g. TEMP\_uncertainty:standard\_name = "sea\_surface\_temperature standard\_error")

The attribute <PARAM>:accuracy becomes optional when uncertainty is defined in either the attribute <PARAM>:uncertainty or the variable <PARAM\_uncertainty>.

If it is impossible to estimate the overall measurement uncertainty, it is required to define at least the attribute <PARAM>:accuracy with the nominal sensor accuracy. Accuracy characterises how close the measurement of a quantity is to the value of that quantity (systematic errors reduce accuracy).

The attributes <PARAM>:precision and <PARAM>:resolution are optional, they contain the sensor precision and resolution if defined. Precision characterises the level of agreement between repeated measurements of a quantity under unchanged conditions (random errors reduce precision).

### **3.3.6.3 - Example**

This example is extracted from the "IMOS Data Streams and their Uncertainties" document (Underwood, 2008).

A temperature measurement may be given as "20.12 degrees Celsius with a 95% confidence of 0.01 degree Celsius". To rephrase this, there are 5 chances in one hundred that the real temperature (the measurand) was outside the range 20.12 C +- 0.01 C.

In a NetCDF file, the uncertainty on this temperature measurement will appear as:

TEMP:uncertainty = 0.01

### *3.3.7 - Example (see Appendix 1)*

The use of all the different parameters discussed in this current chapter such as the data file dimensions, the global attributes, the coordinate variables, the data variables and the quality control variables is given Appendix 1 using sea surface temperature as an example.

## 4 - IMOS METADATA FORMAT

---

All IMOS data will be available online through an IMOS/eMII data portal.

Some data users will know exactly what data sets they wish to use and will be able to access those data directly. However, some users will need to search the IMOS data catalogues to find out what data is available. The diversity of IMOS data means that there needs to be an efficient, searchable catalogue of metadata describing the data that is available. The eMII MEST will perform the role of this catalogue.

IMOS metadata requirements comply to international standards and particularly to the Marine Community Profile of ISO19115 (Reed 2008).

MEST metadata records can be generated manually or automatically:

- MEST metadata records can be created manually in xml or using a Metadata entry application, however, this time consuming process requires some knowledge of the ISO standard.
- MEST metadata records can be mapped automatically from netCDF global attributes

When netCDF data files are provided, eMII intend to automate the creation of metadata records.

NetCDF files produced to this IMOS netCDF convention contain all of the metadata required by the Marine Community Profile of ISO19115 and other international standards. eMII MEST records can be generated from netCDF global attributes without further effort on the part of IMOS facilities / data suppliers.

### 4.1 - IMOS MEST

A link to the IMOS MEST (Metadata Entry and Search Tool) can be found online at:

[http://imos.org.au/emii\\_data.html](http://imos.org.au/emii_data.html)

The url for the IMOS MEST is:

<http://imosmest.aodn.org.au/>

## 5 - IMOS FILE NAMING CONVENTION

---

NetCDF files will be named according to the IMOS NetCDF File Naming Convention (Mancini et. al 2008), see Appendix 3.

The most recent version of the IMOS NetCDF file naming convention can be found online at:

[http://imos.org.au/facility\\_manuals.html](http://imos.org.au/facility_manuals.html)



## 6 - REFERENCE TABLES

---

### 6.1 - IMOS parameter dictionary

Currently, IMOS parameter names are not strictly standardised. The parameter dictionary seeks to rectify this problem.

**Reference Table A** lists parameter names, standard names (or long names for non-CF parameters) and units. The list is not exhaustive and will continue to expand as the netCDF convention is implemented. Ultimately, this list will constitute an IMOS data parameter dictionary. Where possible, the standard names used in the IMOS parameter dictionary are taken from the CF standard names, available at:

<http://cf-pcmdi.llnl.gov/documents/cf-standard-names/>

Additional (non-CF) parameter names are derived from dictionaries that can be found on the web:

- a list of parameter names available on the WOCE website using GF3 codes (WOCE, 2009):

[http://woce.nodc.noaa.gov/woce\\_v3/wocedata\\_1/sss/documents/liste\\_param.htm](http://woce.nodc.noaa.gov/woce_v3/wocedata_1/sss/documents/liste_param.htm)

- a parameter dictionary available on the OceanSites website (OceanSites, 2008):

<http://www.ifremer.fr/co/etc/oceansites/oceansites-user-manual-parameters.pdf>

Non-CF names are marked in the table with the symbol “†”.

Non-CF parameters (with no CF ‘standard name’) should be described using only the attribute ‘long name’.

All units defined for the parameters are compliant with Udunits (Unidata Program Centre of the University Corporation for Atmospheric Research, 2008) as implemented by the CF standard. Definitions are available from:

<http://www.unidata.ucar.edu/software/udunits>

Multiple instances of the same parameter in a dataset should be distinguished with a suffix, underscore and number, e.g. ABSI\_1, ABSI\_2, ABSI\_3, ABSI\_4 for four simultaneous measures of acoustic backscatter intensity from four different sensors. Standard name remains constant across all instances of the variable. Long name can be used to describe the source of the measurements.

**Reference Table A : List of IMOS parameter names, standard names (or long names for Non CF parameters) and units. Non-CF parameters are marked with the symbol "†".**

Parameter	CF standard name (or long name for Non CF parameter "†")	Units
† ABSI	acoustic_backscatter_intensity	Decibels
† ADCP_CORR	adcp_correlation_magnitude	.
† ADCP_GOOD	adcp_percentage_good	percent
AIRT	air_temperature	Celsius
ATMP	air_pressure	Pascal
ATMS	air_pressure_at_sea_level	Pascal
CDIR	direction_of_sea_water_velocity	Degrees clockwise from true North in the direction of the current
† CDOM	concentration_of_coloured_dissolved_organic_matter	ppb
CNDC	sea_water_electrical_conductivity	S m <sup>-1</sup>
CPHL	mass_concentration_of_chlorophyll_in_sea_water	mg m <sup>-3</sup>
CHLF	mass_concentration_of_chlorophyll_in_sea_water (using factory coefficient calibration)	mg m <sup>-3</sup>
CHLU	mass_concentration_of_chlorophyll_in_sea_water (using user coefficient calibration)	mg m <sup>-3</sup>
† CHLR	raw_concentration_of_chlorophyll_in_sea_water	counts
CSPD	sea_water_speed	m s <sup>-1</sup>
DEPTH	depth	m
DEWT	dew_point_temperature	Celsius
DOX1	mole_concentration_of_dissolved_molecular_oxygen _in_sea_water	mol l <sup>-1</sup>
DOX2	moles_of_oxygen_per_unit_mass_in_sea_water	mol kg <sup>-1</sup>
DOXS	fractional_saturation_of_oxygen_in_sea_water	percent
DOXY	mass_concentration_of_oxygen_in_sea_water	kg m <sup>-3</sup>

DOXY_TEMP	temperature_of_sensor_for_oxygen_in_sea_water	Celsius
DRYT	dry_bulb_temperature	Celsius
DYNHT	dynamic_height	m
† ECUR	error_sea_water_velocity	m s <sup>-1</sup>
† FLU2	fluorescence_in_sea_water	count
† FREQUENCY	frequency	Hz
† HEADING	heading	Degrees
† HEAT	heat_content	10 <sup>10</sup> J m <sup>-2</sup>
HEAT_NET	upward_heat_flux_in_air	W m <sup>-2</sup>
† HEIGHT_ABOVE_SENSOR	height_above_sensor	m
HL	surface_upward_latent_heat_flux	W m <sup>-2</sup>
HS	surface_upward_sensible_heat_flux	W m <sup>-2</sup>
ISO<n> <sup>9</sup>	isotherm_depth	m
LATITUDE	latitude	degrees north
LONGITUDE	longitude	degrees east
LW	surface_downwelling_longwave_flux_in_air	W m <sup>-2</sup>
LW_NET	surface_net_upward_longwave_flux	W m <sup>-2</sup>
MASS_NET	upward_mass_flux_of_air	kg m <sup>-2</sup> s <sup>-1</sup>
NTRI	mole_concentration_of_nitrate_in_sea_water	mole m <sup>-3</sup>
† OPBS	optical_backscattering_coefficient	.
PCO2	surface_partial_pressure_of_carbon_dioxide_in_air	Pascal
† PHOS	moles_of_phosphate_per_unit_mass_in_sea_water	mole kg <sup>-1</sup>
PITCH	platform_pitch_angle	Degrees
PRES	sea_water_pressure	dbar
† PRES_REL	sea_water_relative_pressure	dbar
PSAL	sea_water_salinity	1e <sup>-3</sup>
Q	specific_humidity	
RRATE	rainfall_rate	mm s <sup>-1</sup>
RAIN_AMOUNT	thickness_of_rainfall_amount	m
RELH	relative_humidity	%

<sup>9</sup> ISO<n> = depth of isotherm <n> degrees Celsius, for example, ISO17 = depth of 17 degree Celsius isotherm.

ROLL	platform_roll_angle	Degrees
SLCA	mole_concentration_of_silicate_in_sea_water	mole m <sup>-3</sup>
SRAD	isotropic_shortwave_radiance_in_air	W m <sup>-1</sup> sr <sup>-1</sup>
SSPD	speed_of_sound_in_sea_water	m s <sup>-1</sup>
SST	sea_surface_skin_temperature	Celsius
† SSDS	sea_surface_wave_directional_spread	Degrees clockwise from true North
† SSWD	sea_surface_wave_direction_spectral_density	Degrees clockwise from true North
SSWP	sea_surface_swell_wave_period	s
SSWV	sea_surface_wave_directional_variance_spectral_density	m <sup>2</sup> s deg <sup>-1</sup>
SW	surface_downwelling_shortwave_flux_in_air	W m <sup>-2</sup>
SW_NET	surface_net_upward_shortwave_flux	W m <sup>-2</sup>
TAU	magnitude_of_surface_downward_stress	Pascal
TEMP	sea_water_temperature	Celsius
TIME	time	s
†TURB	turbidity	NTU
UCUR	eastward_sea_water_velocity	m s <sup>-1</sup>
UWND	eastward_wind	m s <sup>-1</sup>
VAVH	sea_surface_wave_significant_height	m
VAVT	sea_surface_wave_zero_upcrossing_period	s
† VBSC	volumetric_backscatter_coefficient	m <sup>-1</sup> sr <sup>-1</sup>
VCUR	northward_sea_water_velocity	m s <sup>-1</sup>
VDEN	sea_surface_wave_variance_spectral_density	m <sup>2</sup> s
VDIR	sea_surface_wave_from_direction	Degrees clockwise from true North

† VOLT	voltage	V
VWND	northward_wind	m s <sup>-1</sup>
WAV_DIR	sea_surface_wave_from_direction	Degrees clockwise from true North
WDIR	wind_to_direction	Degrees clockwise from true North
WSPD	wind_speed	m s <sup>-1</sup>
WCUR	upward_sea_water_velocity	m s <sup>-1</sup>

## 6.2 - Quality control flag scale

### 6.2.1 -Introduction

The quality control flags indicate the data quality of the data values in a file, and are assigned after quality control procedures have been performed. These codes are used in the <PARAM\_quality\_control> (example: Byte TEMP\_quality\_control(TIME,DEPTH)) variables to describe the quality of each measurement, or in attributes <PARAM>:quality\_control\_indicator (example: TEMP:quality\_control\_indicator = 0) to describe the overall quality of the parameter.

### 6.2.2 -Quality Control Set

The global attribute **quality\_control\_set** enables the user to define which Quality Control procedure was applied to the dataset. Please see section 3.3.5 - for definitions of Quality Control sets.

If your facility is using a different set of quality control codes please supply eMII with the details. If appropriate, we will incorporate your codes into the IMOS convention and create a QC set that meets your needs.

**Reference Table B : List of QC procedure flags used in the IMOS project**

Set Number	Description
1	IMOS standard set using the IODE flags
2	ARGO quality control procedure
3	BOM (SST and Air-Sea flux) quality control procedure
4	WOCE quality control procedure (Multidisciplinary Underway Network – CO <sub>2</sub> measurements)

### *6.2.3 -SET 1 IMOS standard set using the IODE flags*

**Reference Table C : IMOS standard set using the IODE flags**

Flag Value	Meaning	Description
0	No QC performed	The level at which all data enter the working archive. They have not yet been quality controlled
1	Good data	Top quality data in which no malfunctions have been identified and all real features have been verified during the quality control process
2	Probably good data	Good data in which some features (probably real) are present but these are unconfirmed. Code 2 data are also data in which minor malfunctions may be present but these errors are small and/or can be successfully corrected without seriously affecting the overall quality of the data.
3	Bad data that are potentially correctable	Suspect data in which unusual, and probably erroneous features are observed
4	Bad data	Obviously erroneous values are observed
5	Value changed <sup>10</sup>	Altered by a QC Centre, with original values (before the change) preserved in the history record of the profile
6	Not used	Flag 6 is reserved for future use
7	Not used	Flag 7 is reserved for future use
8	Interpolated value	Indicates that data values are interpolated
9	Missing value	Indicates that the element is missing

---

<sup>10</sup> eMII discourage the use of this flag. Where data values must be changed (e.g. smoothing of data sets) we strongly prefer that the original data be retained and an additional variable be added to accommodate the interpolated/corrected data values.

### 6.2.4 -SET 2 ARGO quality control procedure

#### 6.2.4.1 - ARGO measurement flag scale

**Reference Table D : ARGO measurement flag scale**

Flag Value	Meaning	Real-time comment	Delayed-mode comment
0	No QC was performed	No QC was performed	No QC was performed
1	Good data	All ARGO real-time QC tests passed	The adjusted value is statistically consistent and a statistical error estimate is supplied
2	Probably good data	Probably good data	Probably good data
3	Bad data that are potentially correctable	Argo QC tests (15, 16 or 17, see Carval et al 2008) failed and all other real-time QC tests passed. These data are not to be used without scientific correction. A flag 3 may be assigned by an operator during additional visual QC for bad data that may be corrected in delayed mode	An adjustment has been applied, but the value may still be bad
4	Bad data	Data have failed one or more of the real-time QC tests, excluding Test 16 (see Carval et al 2008). A flag 4 may be assigned by an operator during additional visual QC for bad data that are not	Bad data. Not adjustable



		correctable	
5	Value changed <sup>11</sup>	Value changed	Value changed
6	Not used	Not used	Not used
7	Not used	Not used	Not used
8	Interpolated value	Interpolated value	Interpolated value
9	Missing value	Missing value	Missing value

#### 6.2.4.2 - ARGO profile quality flags

Argo profile qualities (A to F) are defined as the percentage of levels (N) with good data, where:

- QC flag values of 1, 2, 5 or 8 are GOOD data
- QC flag values of 9 (missing) are NOT USED in the computation
- All other QC flag values are BAD data

The computation should be taken from <PARAM\_ADJUSTED\_QC> if available and from <PARAM\_QC> otherwise (Carval et al 2008).

#### Reference Table E : ARGO profile quality flags

Flag	Meaning
" " (blank)	No QC performed
A	N = 100%; All profile levels contain good data
B	75% <= N < 100%
C	50% <= N < 75%
D	25% <= N < 50%

---

<sup>11</sup> eMII discourage the use of this flag. Where data values must be changed we strongly prefer that the original data be retained and an additional variable be added to accommodate the interpolated/corrected data values.

E	0% <= N < 25%
F	N = 0%; No profile levels have good data

Example:

A TEMP profile has 60 levels (3 levels contain missing values)

- 45 levels are flagged as 1
- 5 levels are flagged as 2
- 7 levels are flagged as 4
- 3 levels are flagged as 9 (missing)

Percentage of good levels =  $((45+5)/57)*100 = 87.7\%$

PROFILE\_TEMP\_QC = "B"

### *6.2.5 -SET 3 BOM quality control procedure (SST and Air-Sea fluxes)*

**Reference Table F** summarises the different flags used by the Bureau of Meteorology to qualify the quality for different datasets, particularly SST and Air-Sea fluxes (Verein 2008).

**Reference Table F : BOM Quality Control procedure flags (SST and Air Sea Fluxes)**

Flag	Purpose
B	Value out of bounds
C	Time not sequential
D *	Failed $T > T_w > T_d$ test (see Verein 2008)
E *	Failed resultant wind recomputation test
F	Platform velocity unrealistic
G **	Value exceeds (climatological) threshold
H ***	Discontinuity in data
L	Value located over land
T	Time duplicate
U *	Suspect data (statistical)
V *	Spike in data (statistical)
X *	Step in data (statistical)
Z	Value passes all test

Note: \* - test is not realized yet, \*\* - applied for SST, \*\*\* - applied for time

*6.2.6 -Set 4 WOCE quality control procedure (Multidisciplinary Underway Network – CO<sub>2</sub> measurements)*

**Reference Table G : WOCE quality control procedure flags (CO<sub>2</sub> measurements)**

Flag	Meaning
2	good
3	questionable
4	bad

If data is flagged as questionable (flag number 3), the variable SUBFLAG is used to add more information.

Table GG: SUBFLAG variable for questionable measurements

Flag	Meaning
1	Outside of standard range
2	questionable/interpolated SST (Sea Surface Temperature)
3	questionable EQU temperature
4	Anomalous (EQU T-SST) (+- 1 C)
5	questionable sea-surface salinity
6	questionable pressure
7	low EQU gas flow
8	questionable air value
10	other, water flow

References: "Pierrot,D. et al. 2009, Recommendations for Autonomous Underway pCO<sub>2</sub> Measuring Systems and Data Reduction Routines, Deep-Sea Research II, doi:10.1016/j.dsr2.2008.12.005"

## 6.3 - Cell methods

Cell methods are applied in generating the parameter value for a cell, particularly for raster data sets. This table is extracted from the NetCDF Climate and Forecast (CF) convention version 1.2 (Eaton et al 2008).

In the Units column, u indicates the units of the physical quantity before the method is applied.

**Reference Table H : List of different cell methods, derived from the CF convention**

Cell method	Units	Description
point	u	The data values are representative of points in space or time (instantaneous). This is the default method for a quantity that is intensive with respect to the specified dimension.
sum	u	The data values are representative of a sum or accumulation over the cell. This is the default method for a quantity that is extensive with respect to the specified dimension
maximum	u	Maximum
median	u	Median
mid_range	u	Average of the maximum and minimum
minimum	u	Minimum
mean	u	Mean (average value)
mode	u	Mode (most common value)
standard_deviation	u	Standard deviation
variance	u <sup>2</sup>	Variance

## 7 - REFERENCES

---

Bainbridge, S. 2008. *Data Standards Framework for the IMOS instrument Data*. AODCJF Internal Report.

Carval, T., Keeley, B., Takatsuki, Y, Yoshida, T., Lock, S., Schmid, C., Goldsmith, R., Wong, A., McCreddie, R., Thresher, A and Tran, A. 2008. *Argo Data Management User's Manual Version 2.1*. IFREMER.

*Convention for the standardisation of NetCDF Files*. 1995. Sponsored by the "Cooperative Ocean/Atmosphere Research Data Service, a NOAA/university cooperative for the sharing and distribution of global atmospheric and oceanographic research data sets. [http://ferret.wrc.noaa.gov/noaa\\_coop/coop\\_cdf\\_profile.html](http://ferret.wrc.noaa.gov/noaa_coop/coop_cdf_profile.html). Accessed December 2008.

Eaton, B., Gregory, J., Drach, B., Taylor, K, Hnakin, S., Caron, J., Signell, R., Bentley, P. Rappa, G., Höck H., Pamment A. and Juckes M. 2009. *NetCDF Climate and Forecast (CF) Metadata Conventions v1.6* <http://cf-pcmdi.llnl.gov/>. Accessed December 2011.

International Organization for Standardization. 2009. *Numeric representation of Dates and Time*. [http://www.iso.org/iso/support/faqs/faqs\\_widely\\_used\\_standards/widely\\_used\\_standards\\_other/date\\_and\\_time\\_format.htm](http://www.iso.org/iso/support/faqs/faqs_widely_used_standards/widely_used_standards_other/date_and_time_format.htm). Accessed 27 Jan 2009

Mancini, S., Tattersall, K., and Proctor, R. 2008. *IMOS NetCDF File Naming Convention v1.3* [http://imos.org.au/facility\\_manuals.html](http://imos.org.au/facility_manuals.html). Accessed 31 January 2009.

OceanSITES. 2007. *Taking the Pulse of the Global Ocean* <http://www.oceansites.org>. Accessed 27 January 2009.

OceanSites 2008. *OceanSites Parameters Table*. <http://www.ifremer.fr/co/etc/oceansites/oceansites-user-manual-parameters.pdf> . Accessed 27 January 2009.

Olsen, L.M, G. Major, K. Shein, J. Scialdone, R. Vogel, S. Leicester, H. Weir, S. Ritz, T. Stevens, M. Meaux,c. Salomon, R. Bilodeau, M. Holland, T. Northcutt, R.A. Restrepo, 2007. NASA/Global Change Master Directory (GCMD) Earth Science Keywords version 6.0.0.0.0. [http://gcmd.nasa.gov/Resources/valids/archives/keyword\\_list.html](http://gcmd.nasa.gov/Resources/valids/archives/keyword_list.html) . Accessed 18 Mar 2009.

Reed, G. 2008. *Marine Community Profile of ISO 19115 Version 1.4*. Australian Ocean Data Centre Joint Facility

Rew, R., Davis, G., Emmersson, S. and Davies, H. 2008. *UniData NetCDF User's Guide* <http://www.unidata.ucar.edu/>. Accessed 20 Dec 2008.

SeaDataNet 2009. *SeaDataNet measurand qualifier flags : list key L201*.  
[http://seadatanet.maris2.nl/v\\_bodc\\_vocab/welcome.aspx](http://seadatanet.maris2.nl/v_bodc_vocab/welcome.aspx). Accessed 27 Jan 2009.

Time and Date AS. 2009. *Time Zone in Hobart*  
<http://www.timeanddate.com/worldclock/timezone.html?n=396>. Accessed 27 Jan 2009.

Underwood, M. 2008. *IMOS Data streams and their Uncertainties v 3.1*  
[http://imos.org.au/facility\\_manuals.html](http://imos.org.au/facility_manuals.html). Accessed 15 December 2008.

Unidata Program Centre of the University Corporation for Atmospheric Research. 2008. *Writing NetCDF Files: Best Practices* <http://www.unidata.ucar.edu/software/netcdf/docs/BestPractices.html>. Accessed 15 December 2008.

Unidata Program Centre of the University Corporation for Atmospheric Research. 2008. *UDUNITS Software Package*. <http://www.unidata.ucar.edu/software/udunits/>. Accessed 15 December 2008..

Verein, R. 2008. *Quality Control procedure for automated processing of IMOS ship and mooring observations (Facilities 2c, 2d and 3)*. CAWCR. Australian Bureau of Meterology.

Wikipedia contributors. 2008. *Wikipedia, The Free Encyclopedia : ISO 8601*  
[http://en.wikipedia.org/wiki/ISO\\_8601](http://en.wikipedia.org/wiki/ISO_8601). Accessed Jan 20 2009.

World Ocean Circulation Experiment 2009. *WOCE Parameter Lists: Basic Parameters & Full List of Parameters with extended-GF3 codes*.  
[http://woce.nodc.noaa.gov/woce\\_v3/wocedata\\_1/sss/documents/liste\\_param.htm](http://woce.nodc.noaa.gov/woce_v3/wocedata_1/sss/documents/liste_param.htm) . Accessed 27 January 2009.

## APPENDIX 1: EXAMPLE NETCDF FILE

---

This is an example IMOS formatted NetCDF file for SOOP XBT (expendable bathythermograph) data.

```
netcdf IMOS_SOOP-XBT_T_20071120T150000Z_PX34_FV01 {
dimensions:
    TIME = UNLIMITED ; // (11465 currently)
    LONGITUDE = 80 ;
    LATITUDE = 80 ;
    DEPTH = 30 ;
variables:
    double TIME(TIME) ;
        TIME:long_name = "time" ;
        TIME:units = "days since 1950-01-01 00:00:00Z" ;
        TIME:standard_name = "time" ;
        TIME:_FillValue = 99999 ;
        TIME:valid_min = 0 ;
        TIME:valid_max = 54750 ;
        TIME:calendar = 'gregorian' ;
        TIME:quality_control_set = 1 ;
        TIME:quality_control_indicator = 1 ;
        TIME:uncertainty = 0.0003 ;
        TIME:axis = "T" ;
        TIME:local_time_zone = 10 ;
        TIME:ancillary_variables = "TIME_quality_control"
    byte TIME_quality_control(TIME) ;
        TIME_quality_control:standard_name = "time status_flag" ;
        TIME_quality_control:long_name = "quality control flag for time"
        TIME_quality_control:quality_control_convention = "IMOS standard set using IODE flags";
        TIME_quality_control:quality_control_set = 1
        TIME_quality_control:valid_min = 0 ;
        TIME_quality_control:valid_max = 9 ;
        TIME_quality_control:_FillValue = -1 ;
        TIME_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
        TIME_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
        bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
        missing_value";
    float LONGITUDE(LONGITUDE) ;
        LONGITUDE:long_name = "longitude of each location" ;
        LONGITUDE:units = "degrees_east" ;
        LONGITUDE:standard_name = "longitude" ;
        LONGITUDE:_FillValue = 99999 ;
        LONGITUDE:valid_min = -180 ;
        LONGITUDE:valid_max = 180 ;
        LONGITUDE:quality_control_set = 1 ;
        LONGITUDE:quality_control_indicator = 1 ;
        LONGITUDE:uncertainty = 0.0001 ;
```



```

LONGITUDE:axis = "X" ;
LONGITUDE:reference_datum = "geographical coordinates, WGS84 projection" ;
LONGITUDE:ancillary_variables = "LONGITUDE_quality_control"
byte LONGITUDE_quality_control(LONGITUDE) ;
    LONGITUDE_quality_control:standard_name = "longitude status_flag" ;
    LONGITUDE_quality_control:long_name = "quality control flag for longitude"
    LONGITUDE_quality_control:quality_control_convention = "IMOS standard set using IODE flags";
    LONGITUDE_quality_control:quality_control_set = 1 ;
    LONGITUDE_quality_control:valid_min = 0 ;
    LONGITUDE_quality_control:valid_max = 9 ;
    LONGITUDE_quality_control:_FillValue = -1 ;
    LONGITUDE_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
    LONGITUDE_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
    bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
    missing_value";
float LATITUDE(LATITUDE) ;
    LATITUDE:long_name = "latitude of each location" ;
    LATITUDE:units = "degrees_north" ;
    LATITUDE:standard_name = "latitude" ;
    LONGITUDE:_FillValue = 99999 ;
    LONGITUDE:valid_min = -90 ;
    LONGITUDE:valid_max = 90 ;
    LONGITUDE:quality_control_set = 1 ;
    LONGITUDE:quality_control_indicator = 1 ;
    LONGITUDE:uncertainty = 0.0001 ;
    LONGITUDE:axis = "Y" ;
    LONGITUDE:reference_datum = "geographical coordinates, WGS84 projection" ;
    LATITUDE:ancillary_variables = "LATITUDE_quality_control"
byte LATITUDE_quality_control(LATITUDE) ;
    LATITUDE_quality_control:standard_name = "latitude status_flag" ;
    LATITUDE_quality_control:long_name = "quality control flag for latitude"
    LATITUDE_quality_control:quality_control_convention = "IMOS standard set using IODE flags";
    LATITUDE_quality_control:quality_control_set = 1 ;
    LATITUDE_quality_control:valid_min = 0 ;
    LATITUDE_quality_control:valid_max = 9 ;
    LATITUDE_quality_control:_FillValue = -1 ;
    LATITUDE_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
    LATITUDE_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
    bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
    missing_value";
float DEPTH(DEPTH) ;
    DEPTH:long_name = "depth" ;
    DEPTH:units = "metres" ;
    DEPTH:standard_name = "depth" ;
    DEPTH:_FillValue = 99999 ;
    DEPTH:valid_min = 0 ;
    DEPTH:valid_max = 12000 ;
    DEPTH:positive = "down";
    DEPTH:quality_control_set = 1 ;
    DEPTH:quality_control_indicator = 1 ;

```

```

DEPTH:uncertainty = 0.01 ;
DEPTH:axis = "Z" ;
DEPTH:reference_datum = "Mean Sea Level (MSL)" ;
DEPTH:ancillary_variables = "DEPTH_quality_control"
byte DEPTH_quality_control(DEPTH) ;
  DEPTH_quality_control:standard_name = "depth_status_flag" ;
  DEPTH_quality_control:long_name = "quality control flag for depth"
  DEPTH_quality_control:quality_control_convention = "IMOS standard set using IODE flags";
  DEPTH_quality_control:quality_control_set = 1 ;
  DEPTH_quality_control:valid_min = 0 ;
  DEPTH_quality_control:valid_max = 9 ;
  DEPTH_quality_control:_FillValue = -1 ;
  DEPTH_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
  DEPTH_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
missing_value";
float TEMP(TIME, DEPTH, LATITUDE, LONGITUDE) ;
  TEMP:long_name = "Surface Temperature in degrees C" ;
  TEMP:units = "Celsius" ;
  TEMP:standard_name = "sea_water_temperature" ;
  TEMP:_FillValue = 99999 ;
  TEMP:quality_control_set = 1 ;
  TEMP:valid_min = -2.0 ;
  TEMP:valid_max = 40 ;
  TEMP:ancillary_variables = "TEMP_quality_control";
  TEMP:uncertainty = 0.001 ;
byte TEMP_quality_control(TIME, DEPTH, LATITUDE, LONGITUDE) ;
  TEMP_quality_control:standard_name = "sea_water_temperature_status_flag" ;
  TEMP_quality_control:long_name = "quality control flag for sea_water_temperature" ;
  TEMP_quality_control:quality_control_convention = "IMOS standard set using IODE flags";
  TEMP_quality_control:quality_control_set = 1 ;
  TEMP_quality_control:valid_min = 0 ;
  TEMP_quality_control:valid_max = 9 ;
  TEMP_quality_control:_FillValue = -1 ;
  TEMP_quality_control:flag_values = 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 ;
  TEMP_quality_control:flag_meanings = "no_qc_performed good_data probably_good_data
bad_data_that_are_potentially_correctable bad_data value_changed not_used not_used interpolated_value
missing_value";

// global attributes:
:project = "Integrated Marine Observing System" ;
:title = " IMOS_SOOP-XBT_T_20071120T150000Z_PX34_FV01 " ;
:institution = "Enhanced measurements from Ships of Opportunity (SOOP)" ;
:conventions = "CF-1.6, IMOS-1.3" ;
:date_created = "2007-12-10T12:00:00Z" ;
:source = "Ship observation" ;
:keywords = "Oceans>Ocean Temperature>Water Temperature" ;
:data_centre_email = "info@emii.org.au" ;
:principal_investigator = "Doe, John"
:geospatial_lat_min = -35.0 ;

```

```
:geospatial_lat_max = -36.0 ;
:geospatial_lon_min = 151 ;
:geospatial_lon_max = 152 ;
:geospatial_vertical_min = 0 ;
:geospatial_vertical_max = 300 ;
:time_coverage_start = "2007-11-20T15:00:00Z" ;
:time_coverage_end = "2008-11-11T14:00:00Z" ;
:data_centre = "eMarine Information Infrastructure" ;
:netcdf_version = 3.5 ;
:references = "http://www.imos.org.au" ;
:abstract = " Temperature data from the TOGA/WOCE transect PX34 across the Tasman Sea has been
collected since January 1991 and are ongoing. The transect is repeated approximately 4 times a year, with
profiles obtained approximately every 10-50 Km. The data are obtained from XBTs (expendable
bathothermographs) deployed via merchant vessels, and are managed by the Joint Australian Facility for Ocean
Observing Systems (JAFOOS), a collaborative venture between CSIRO Marine Research and the Bureau of
Meteorology Research Centre (BMRC). This NetCDF file was created using The IMOS netCDF file naming
convention version 1.2 and the IMOS netCDF user's manual version 1.1." ;
:citation = "IMOS, 2009, TOGA/WOCE transect PX34 XBT data : November 2007 to November 2008,
www.emii.org.au" ;
```

```
//Data
```

```
TIME : 21142.50, 21142.75, 21143, 21143.25, 21143.50, 21143.75, ....

TIME_quality_control :1, 1, 1, 1, 1, 1, 1 ....

LATITUDE : -35.1233, -35.1334, -35.1445,-35.2551, -35.3610, -35.4520, .....

LATITUDE_quality_control : 1, 1, 1, 1, 1, 1, 1 ....

LONGITUDE : 150.1100, 150.2110, 150.3510, 150.3610, 150.4015, 150.4512, ....

LONGITUDE_quality_control1, 1, 1, 1, 1, 1, 1 ....

DEPTH : 0.25, 0.50, 0.75, 1.00, 1.25, 1.50, ....

DEPTH_quality_control : 1, 1, 1, 1, 1, 1, 1 ....

TEMP : 15.12, 16.25, 18.56, 20.45, 25.46, 18.25, .....

TEMP_quality_control :1, 2, 2, 2, 1, 1, 1 ....
```

```
}
```

## APPENDIX 2: IMOS TOOLBOX OPTIONAL GLOBAL ATTRIBUTES

The IMOS-Toolbox has been developed by the Australian National Mooring Network, supported by IMOS and the eMarine Information Infrastructure. It is written in MATLAB and Java with a graphical user interface and aims at converting oceanographic data files into pre-processed and quality controlled NetCDF files. This IMOS moorings data toolbox is freely available in a standalone Windows executable with its source code. More documentation and downloads can be found at <http://code.google.com/p/imos-toolbox/>. For the moorings purpose, this toolbox automatically documents these optional global attributes:

	Name	Type	Example	Definition
	<b>What</b>			
Non-CF attribute	toolbox_input_file	S	toolbox_input_file = "E:\Documents and Settings\ggalibert\My Documents\IMOS_toolbox\data_files_examples\NSWDATA\MOORINGS\SYD100\RAW\021_SYD100_15Dec2010\WQM\ASCII\WQM0141_031.DAT"	Full local path and filename of the original data file processed by the toolbox.
Non-CF attribute	toolbox_version	S	toolbox_version = "2.1b"	Version of the toolbox used to process data.
Non-CF attribute	deployment_code	S	deployment_code = "NRSMAI-0807"	Deployment unique code within IMOS project, usually composed of a site_code and a date information in format YYMM or YYMMDD. Its content can be adapted to what suits best any particular needs of a facility.
Non-CF attribute	instrument_serial_number	S	instrument_serial_number = "40"	Serial number of the instrument from which the data

				has been collected.
Non-CF attribute	instrument_sample_interval	N	instrument_sample_interval = 1	Sampling interval in seconds performed by the instrument on this data set.
Non-CF attribute	instrument_burst_interval	N	instrument_burst_interval = 900	Interval in seconds between two bursts of data collection performed by the instrument on this data set. Note that not all instruments are sampling data using bursts.
Non-CF attribute	instrument_burst_duration	N	instrument_burst_duration = 120	Duration in seconds of a burst. Note that not all instruments are sampling data using bursts.
Non-CF attribute	<b>Where</b>			
	instrument_nominal_depth	N	instrument_nominal_depth = 90	Instrument nominal depth below sea surface in metres.
	instrument_nominal_height	N	instrument_nominal_height = 0	Instrument nominal depth above sea floor in metres.
	site_nominal_depth	N	site_nominal_depth = 90	Site nominal depth below sea surface in metres.
	site_depth_at_deployment	N	site_depth_at_deployment = 84	Measured depth on site at deployment in metres.
Non-CF attribute	<b>When</b>			
	time_deployment_start	S	time_deployment_start = "2008-11-23T10:16:00Z"	Start date in UTC when the instrument is deployed in its nominal position. See chapter 0 on time format below.
	time_deployment_end	S	time_deployment_end = "2009-01-06T09:43:00Z"	Final date in UTC when the instrument is retrieved from its nominal position. See chapter 0 on time format below.

## APPENDIX 3: IMOS NETCDF FILENAMING CONVENTION V 1.4

---



---

**FACILITY 10: eMarine Information Infrastructure (eMII)**

# **IMOS NETCDF FILE NAMING CONVENTION**

**Version 1.4**  
**February 22nd, 2012**

## Table of contents

---

PREFACE TO VERSION 1.4 .....	1
PREFACE TO VERSION 1.3 .....	1
PREFACE TO VERSION 1.2 .....	1
PREFACE TO VERSION 1.1 .....	1
<b>1 - FILE NAMING CONVENTION .....</b>	<b>4</b>
1.1 - DATA FILE NAMING CONVENTION .....	4
1.1.1 - Reference Table 1: Facility Codes .....	7
1.1.2 - Reference Table 2: Data Codes.....	9
1.1.3 Reference Table 3: Platform Codes .....	11
1.1.4 Reference Table 4: File Version Codes .....	17
1.2 - EXAMPLES .....	18
1.2.1 - Facility 1: ARGO .....	18
1.2.2 - Facility 2: SOOP .....	18
1.2.3 - Facility 3: SOTS .....	19
1.2.4 - Facility 4: ANFOG .....	20
1.2.5 - Facility 5: AUV .....	20
1.2.6 - Facility 6: ANMN .....	20
1.2.7 - Facility 7: ACORN.....	21
1.2.8 - Facility 8: AATAMS.....	22
1.2.9 - Facility 9: FAIMMS.....	22
1.2.10 - Facility 11: SRS .....	22



## PREFACE to version 1.4

A number of facilities have provided **platform codes** which are now included in Reference Table 3.

## PREFACE to version 1.3

The IMOS file naming discussion document has now been implemented as the IMOS NetCDF file naming convention.

Version 1.3 of the IMOS file naming convention has incorporated an extra **data code**: 'P' for pressure of sea water. **Data code** 'F' has been defined more clearly.

A number of facilities have provided **platform codes** which are now included in Reference Table 3.

## PREFACE to version 1.2

Version 1.2 of the IMOS file naming convention incorporates a small number of additional **data codes** requested by users after the release of v 1.1 :

F = Fluxes

K = Chemistry

R = Raw Data

Some facilities have provided us with extended lists of **platform codes**. The platform code table (Reference Table 3) has been updated to incorporate these codes.

If platform codes for your facility are not listed in this document, please provide the code table to eMII.

## PREFACE to version 1.1

Thank you to everyone for your responses to our original file naming discussion document (1.0). The input we've received has been valuable and thought-provoking and we hope has lead to a better and more useful convention, outlined here in discussion document 1.1.

Summary of IMOS facility responses to discussion document version 1.0 :

- File names should be human-readable with less codes
- Platform codes need to be more flexible
- Data versions should be included: eg Level 0 = raw, Level 1 = ...
- Product codes are necessary for creation of unique file names in some facilities eg. 14 day average, 2m gridded data
- Time of file creation and other facility specific file reference codes should be integrated (though perhaps optional)
- End times for data could be included in file names
- Long file names are acceptable

Summary of changes made to document in producing version 1.1 :

- **'Facility codes' were changed to facility acronyms (sub-facilities when necessary).** Some suggested using whole words, eg. 'Moorings', but we decided against this as it could apply to SOTS moorings, ANMN moorings, NRS moorings, Acoustic listening moorings, AATAMS tag receiver moorings or Qld sensor network moorings. Acronyms are more clear for users familiar with IMOS data sets.
- **'Platform codes' are more flexible,** with no limit to the number of characters that can be used.
- **5 levels of data versioning have been defined.** Data versions are identified by the codes FV00 to FV04 as described in this document.
- Optional **'Product codes' have been incorporated into file names.**
- An optional **'Time of creation' field has been incorporated in file names.**
- Optional **'End time' for data has been incorporated into file names.**

In addition :

- File names can be up to 255 characters long
- Date / time format complies with ISO 8601. eMII strongly prefer that all date / time fields are in UTC but have provided guidelines for local time if required.

As in version 1.0, we have provided example file names for each facility.

*Please provide eMII with feedback on this discussion document if you believe that these suggestions will not work for your facility.*

## 1 - FILE NAMING CONVENTION

---

For many data types, **IMOS** uses the netCDF (network Common Data Form) system, a set of software libraries and machine-independent data formats that support the creation, access, and sharing of array-oriented scientific data. <sup>1</sup>

The main purpose of this document is to specify the format of filenames that will be used to distribute **IMOS** data in netCDF format.

**IMOS** netCDF file naming conventions are based on those prescribed by the **OceanSITES** User's Manual, version 1.1. The **OceanSITES** program is a global network of open-ocean sustained time series reference stations that have been implemented by an international partnership of researchers. More information about this project is available at <http://www.oceansites.org>.

### 1.1 - Data file naming convention

The file name extension of each **netCDF file** must be “.nc”.

Filenames can be up to 255 characters in length and are composed of up to 10 fields separated by ‘\_’ (underscore) characters.

Characters which can be used within fields are letters (A to Z) and whole numbers (0 to 9). The hyphen character (-) may also be used within fields.

The NetCDF file name format is:

```
IMOS_<Facility-Code>_<Data-Code>_<Start-date>_<Platform-Code>_FV<File-Version>_  
<Product-Type>_END-<End-date>_C-<Creation_date>_<PARTX>.nc
```

---

<sup>1</sup> <http://www.unidata.ucar.edu.au/software/netcdf/>

The first 6 fields are mandatory and must conform to the following content guidelines:

1. IMOS: Name of the project <sup>2</sup>
2. <Facility-Code> : code representing a facility (and a sub-facility if applicable) (see 1.1.1 - Reference Table 1: Facility Codes).
3. <Data-Code>: list of data codes from reference table 2. The data codes are descriptors of the primary parameters measured. Data codes do not list secondary parameters (see 1.1.2 - Reference Table 2: Data Codes).
4. <Start-date>: start date and time of the measurement, not of file creation. The date and time are formatted to international standard ISO8601. eMII requests that the time be in UTC.

Date format is: YYYYMMDDTHHMMSSZ where T is the delimiter between date and time and Z indicates that time is in UTC. If time is not in UTC, local time must be shown as hours plus or minus from the longitudinal meridian. Z is not appended when local time is used. Examples of the time format are below.

- 20081024T080000Z (UTC)
- 20081024T180000+10 (Local)
- 20081024T020000-06 (Local)

5. <Platform-Code>: code representing the platform <sup>3</sup> (see 0 Reference Table 3: Platform Codes).

---

<sup>2</sup> Any data produced by the IMOS project should be instantly identifiable as 'IMOS' data

<sup>3</sup> **Notes on platform codes:** The platform codes for data file naming conventions (reference table 2) are *under development*.

Platform codes must be unique within an **IMOS** facility and must apply to either one particular unit of equipment or to one particular location.

**To finalise platform codes, eMII needs more information about the formats of different 'platform' codes** that are currently used by each facility. eMII anticipate that the codes already in use within many facilities will be suitable.

Characters which can be used are capital letters (A to Z) and whole numbers (0 to 9). The hyphen character (-) may also be used.

6. <File-Version>: value representing the version of the file (see 1.1.4 Reference Table 4: File Version Codes).

The following 4 fields are optional:

7. <Product-Type>: This code will give information about the product included in the dataset.
8. <End-date>: end date and time of the measurement. The data format is the same as the start date. The code should be preceded by the following four characters END-. An example of the format of the end date should be: "END-20081112T231255Z"
9. <Creation-date>: creation date and time of the file. The data format is the same as the start and end date. The code should be preceded by the two characters C-. An example of the format of the creation date should be "C-20081112T231255Z".
10. <\_PARTX>: when an IMOS data file size becomes excessive (eg: >100Mb), it can be split in smaller parts: PART1, PART2,.....,PARTN

1.1.1 - Reference Table 1: Facility Codes

Facility	Sub-Facility (if applicable)	Code
Argo		ARGO
SOOP	Multi-disciplinary Underway Network XBT	SOOP-XBT
	Multi-disciplinary Underway Network CO <sub>2</sub>	SOOP-CO <sub>2</sub>
	Multi-disciplinary Underway Network CPR	SOOP-CPR
	Sensors on Tropical Research Vessels	SOOP-TRV
	Sea Surface Temperature Sensors	SOOP-SST
	Research Vessel Real Time Air-Sea Fluxes	SOOP-ASF
	Bio-Acoustic	SOOP-BA
	Sensors on Temperate Merchant Vessels	SOOP-TMV
ABOS	Southern Ocean Time Series	ABOS-SOTS
	Air-Sea Flux Stations	ABOS-ASFS
	Deepwater Arrays	ABOS-DA
ANFOG		ANFOG
AUV		AUV
ANMN	Queensland and Northern Australia	ANMN-QLD
	New South Wales	ANMN-NSW
	Southern Australia	ANMN-SA
	Western Australia	ANMN-WA
	Passive Acoustic Observatories	ANMN-PA
	National Reference Stations Analysis and Coordination	ANMN-NRS
	Acidification Moorings	ANMN-AM
ACORN		ACORN
AATAMS		AATAMS
FAIMMS		FAIMMS
SRS	Australian Satellite SST L2P Products	SRS-A

	Australian Ocean Distributed Archive and Access Centre	SRS-B
	Upgrade Hobart Ground Station	SRS-C
	Satellite Altimetry Calibration and Validation	SRS-Altimetry
	Bio-Optical database of Australian waters	SRS-OC-BODBAW
	Lucinda Jetty Coastal Observatory	SRS-OC-LJCO
	Upgrade Townsville Ground Station	SRS-D



1.1.2 - Reference Table 2: Data Codes

Data Code	Meaning
A	Acoustic measurements
B	Biology (plankton, fluorescence)
C	Conductivity (electrical conductivity of sea water)
E	Engineering or technical parameters
F	Fluxes (e.g. radiation, latent heat, sensible heat)
G	Gas (measurement and fluxes)
I	Images
K	Chemistry (nutrients, trace metals)
M	Meteorological parameters (e.g. wind, air pressure, air temperature)
O	Oxygen concentration (in sea water)
P	Pressure
R	Raw data
S	Salinity (of sea water)
T	Temperature (of sea water)
U	Turbidity (of sea water)
V	Velocity (of sea water)
W	Wave parameters (significant wave height,

	peak period, peak direction ...)
--	----------------------------------

### 1.1.3 Reference Table 3: Platform Codes

	Facility	Sub-facility	Platform Codes	Platform Description	Code Description		
1	Argo		Argo convention		No change to Argo data/file name formats		
2	SOOP	2a(i) XBT	PX34	Sydney - Wellington	XBT line identifier		
			IX28	Hobart - Dumont D'Urville			
			PX30-31	Brisbane – Noumea - Suva/ Lautoka			
			IX1	Fremantle - Sunda Strait			
			IX12	Fremantle - Red Sea			
			PX2	Flores Sea - Torres Strait			
			IX22-PX11	Port Hedland - Japan			
			IX15-IX31	Mauritius – Fremantle- Melbourne			
			IX15	Mauritius- Fremantle			
			IX21-IX06	Cape of Good Hope – Mauritius – Malacca Strait			
			IX21	Cape of Good Hope - Mauritius			
			IX8	Mauritius - Bombay			
			IX9	Fremantle – Persian Gulf			
			PX06	Suva - Auckland			
			PX13	New Zealand - California			
			PX17	Tahiti - Panama			
			PX28	Tahiti – Auckland			
			PX31	Noumea - Suva			
			PX33	Hobart – Macquarie Island			
			PX35	Melbourne - Dunedin			
			PX3	Coral Sea			
			PX55	Melbourne – Wellington			
			PX57	Brisbane – Wellington			
		PX5	Brisbane – Japan				
		SO	Southern Ocean				
		Tasman-Sea	Tasman Sea				
				2a(ii) CO2	VLHJ	RV Southern Surveyor	Ship callsign
					FHZI	RV L'Astrolabe	
					VNAA	RSV Aurora Australis	
				2a(iii) CPR	Unknown		ID for CPR deployed, 2-6 letter/number codes eg. Unit 1 = U001 or CPR line if more

					appropriate
		2b Trop Res	VNCF	Cape Ferguson	Ship code :
			VMQ9273	Solander	Callsign/AIMS code
		2c SST	VLHJ	RV Southern Surveyor	Ship callsign or WMO code
			VHW5167	MV Seaflyte (Rottnest Island Ferry)	
			FHZI	RV L'Astrolabe	
			VNAA	RSV Aurora Australis	
			VLST	MV Spirit of Tasmania I	
			VNSZ	MV Spirit of Tasmania II	
			VJQ7467	MV Fantasea (Whitsundays Ferry)	
			C6FS9	MV Stadacona	
			VNAH	MV Portland	
			MNPJ3	MV Pacific Sun	
			VROB	MV Kiribati Chief	
			VNVR	MV Iron Yandi	
			V2BJ5	MV ANL Yarunga	
			VRZN9	Pacific Celebes	
			ZMFR	Tangaroa	
		2d A-S Flux		As for 2c SST Platform Codes	Ship callsign or WMO code
3	ABOS	ABOS-SOTS	SAZOTS	Sub-Antarctic Sediment trap mooring	
			PULSE5H	Pulse 5 'heavy' mooring	
			PULSE5L	Pulse 5 'light' mooring	
			PULSE6	Pulse 6 mooring	
		ABOS-SOFS	SOFS	Southern Ocean Flux Station mooring	
		ABOS-DA	EAC1	East Australian Current 1 mooring	
			EAC2	East Australian Current 2 mooring	
			EAC3	East Australian Current 3 mooring	
			EAC4	East Australian Current 4 mooring	
			EAC5	East Australian Current 5 mooring	
			ITFOMB	Ombai mooring	
			ITFTIN	Timor North mooring	
			ITFTSL	Timor Sill mooring	
			POLYNYA1	Polynya 1 mooring	
			POLYNYA2	Polynya 2 mooring	
			POLYNYA3	Polynya 3 mooring	
4	ANFOG		SG151	Seaglider	Manufacturer unit

			SG152	Seaglider	number	
			SG153	Seaglider		
			SG154	Seaglider		
			SG155	Seaglider		
			SG514	Seaglider		
			SG516	Seaglider		
			SG517	Seaglider		
			SG519	Seaglider		
			SG520	Seaglider		
			SG521	Seaglider		
			SL130	Slocum		
			SL104	Slocum		
			SL106	Slocum		
			SL109	Slocum		
5	AUV		SIRIUS		If other AUVs are recruited to the facility, they will need codes	
6	ANMN	6a QLD	GBROTE	One Tree East	AIMS mooring codes	
			GBRHIS	Heron Island South		
			GBRHIN	Heron Island North		
			GBRELR	Elusive Reef		
			GBRCCH	Capricorn Channel		
			GBRMYR	Myrmidon		
			GBRPPS	Palm Passage		
			GBRLSH	Lizard Shelf		
			GBRLSL	Lizard Slope		
			ITFJBG	Joseph Bonaparte Gulf		
			ITFFTB	Flat Top Banks		
			ITFMHB	Margaret Harries Banks		
			ITFTIS	Timor South		
			KIM050	Kimberley 50m		
			KIM100	Kimberley 100m		
			KIM200	Kimberley 200m		
			KIM400	Kimberley 400m		
			PIL050	Pilbara 50m		
			PIL100	Pilbara 100m		
			PIL200	Pilbara 200m		
			6b NSW	BMP090	Batemans Marine Park 90m	NSW-IMOS mooring codes
				BMP120	Batemans Marine Park 120m	
				CH100	Coffs Harbour 100m	
			CH070	Coffs Harbour 70m		
			SYD100	Sydney 100m		
			SYD140	Sydney 140m		

			PH100	Port Hacking 100m	
			JB070	Jervis Bay	
			ORS065	Ocean Reference Station Sydney	
		6c SA	SAM1DS	M1 Deep Slope	SAIMOS mooring codes
			SAM2CP	M2 Cabbage Patch	
			SAM3MS	M3 Mid-Slope	
			SAM4CY	M4 Canyons	
			SAM5CB	M5 Coffin Bay	
			SAM6IS	M6 Investigator Strait	
			SAM7DS	M7 Deep-Slope	
			SAM8SG	M8 Spencer Gulf Mouth	
		6d WA	WATR05	Two Rocks 50m	WAIMOS mooring codes
			WATR10	Two Rocks 100m	
			WATR15	Two Rocks 150m	
			WATR20	Two Rocks 200m (BGC)	
			WATR50	Two Rocks 500m	
			WACA20	Canyon 200m Head (BGC)	
			WACANO	Canyon 500m North	
			WACASO	Canyon 500m South	
		6e Acoustic	PAPCA1	Perth Canyon, WA 1	Acoustic mooring site codes
			PAPCA2	Perth Canyon, WA 2	
			PAPCA3	Perth Canyon, WA 3	
			PAPCA4	Perth Canyon, WA 4	
			PAPOR1	Portland, VIC 1	
			PAPOR2	Portland, VIC 2	
			PAPOR3	Portland, VIC 3	
			PAPOR4	Portland, VIC 4	
			PASYD1	Sydney, NSW 1	
			PASYD2	Sydney, NSW 2	
			PASYD3	Sydney, NSW 3	
			PASYD4	Sydney, NSW 4	
		6f NRS	NRSYON	Yongala, QLD	
			NRSDAR	Darwin, NT	
			NRSROT	Rottneest, WA	
			NRSMAI	Maria Island, TAS	
			NRSKAI	Kangaroo Island, SA	
			NRSESP	Esperance, WA	
			NRSNIN	Ningaloo, WA	
			NRSNSI	North Stradbroke Island, QLD	
			NRSPHB	Port Hacking, NSW	
		6g AM	NRSMAI	Maria Island, TAS	NRS site code where acidification mooring is
			NRSESP	Esperance, WA	

			NRSYON	Yongala, QLD	located
7	ACORN		CBG	Capricorn Bunker Group	ACORN codes
			TAN	CBG Tannum Sands	
			LEI	CBG Lady Elliot Island	
			SAG	South Australia Gulf	
			CSP	SAG Cape Spencer	
			CWI	SAG Cape Wiles	
			BONC	Bonnie Coast	
			NOCR	BONC Noora Creena	
			BFCV	BONC Blackfellows cave	
			COF	Coffs Harbour	
			RRK	COF Red Rock	
			NNB	COF North Nambucca	
			ROT	Rottnest Shelf	
			FRE	ROT Fremantle	
			GUI	ROT Guilderton	
TURQ	Turquoise Coast				
SBRD	TURQ Seabird				
CRVT	TURQ Cervantes				
8	AATAMS		SYD1	Sydney line (1-30)	Location and receiver position e.g. SYD1 = Sydney line position 1, SYD30 = Sydney line position 30.
			PER1	Perth line (1-30)	
			NRETAN1	Ningaloo Reef Ecological Tracking Array North line (1-7)	
			NRETAC1	NRETA Central line (1-7)	
			NRETAS1	NRETA South line (1-18)	
			MAL1	Mallacoota line (1-30)	
			PORT1	Portland line (1-30)	
			COF1	Coffs Harbour line (1-30)	
9	FAIMMS		HIRP1	Heron Island Relay Pole 1	AIMS sensor network codes eg. Heron Island Relay Pole 1 = HIRP1.
			HIRP2	Heron Island Relay Pole 2	
			HIRP3	Heron Island Relay Pole 3	
			HIRP4	Heron Island Relay Pole 4	
			HIRP5	Heron Island Relay Pole 5	
			HIRP6	Heron Island Relay Pole 6	
			HISF1	Heron Island Sensor Float 1	
			HISF2	Heron Island Sensor Float 2	
			HISF3	Heron Island Sensor Float 3	
			HISF4	Heron Island Sensor Float 4	
			HISF5	Heron Island Sensor Float 5	
			HIWS	Heron Island Weather	

				Station	
			HIBSE	Heron Island Base Station	
			DAVSF1	Davis Reef Sensor Float 1	
			DAVSF2	Davis Reef Sensor Float 2	
			DAVSF3	Davis Reef Sensor Float 3	
			DAVSF4	Davis Reef Sensor Float 4	
			DAVSF5	Davis Reef Sensor Float 5	
			LIZRP2	Lizard Island Relay Pole 2	
			LIZSF1	Lizard Island Sensor Float1	
			LIZSF2	Lizard Island Sensor Float2	
			LIZSF3	Lizard Island Sensor Float3	
			LIZSF4	Lizard Island Sensor Float4	
			LIZWS	Lizard Island weather station	
			OTIRP1	One Tree Island Relay Pole 1	
			OTIRP2	One Tree Island Relay Pole 2	
			OTIRP3	One Tree Island Relay Pole 3	
			OTIWS	One Tree Island Weather Station	
			OTIBSE	One Tree Island Base Station	
			OIRP1	Orpheus Island Relay Pole1	
			OIRP2	Orpheus Island Relay Pole2	
			OIRP3	Orpheus Island Relay Pole3	
			OISF1	Orpheus Island Sensor Float 1	
			OISF2	Orpheus Island Sensor Float 2	
11	SRS		Unknown		Data products in netCDF format may need defining 'codes', eg. SSTL2P. These codes may necessarily be quite complex.



### 1.1.4 Reference Table 4: File Version Codes

The File Version code will enable a file creator to specify the processing version of the file. The different data levels listed below were derived from a discussion paper "Data Standards Framework for the IMOS Instrument Data" prepared by Scott Bainbridge (AIMS) for the AODCJF <sup>4</sup>.

<b>File Version</b>	<b>Definition</b>	<b>Description</b>
FV00	Level 0 – Raw data	Raw data is defined as unprocessed data and data products that have not undergone quality control. The data may be in engineering units or physical units, time and locations details can be in relative units and values can be pre-calibration measurements. Level 0 data is not suitable for public access within IMOS.
FV01	Level 1 – Quality Controlled data	Quality controlled data have passed quality assurance procedures such as routine estimation of timing and sensor calibration or visual inspection and removal of obvious errors. The data are in physical units using standard SI metric units with calibration and other routine pre-processing applied, all time and location values are in absolute coordinates to agreed to standards and datum, metadata exists for the data or for the higher level dataset that the data belongs to. This is the standard IMOS data level and is what should be made available to eMII and to the IMOS community.
FV02	Level 2 – Derived Products	Derived products require scientific and technical interpretation. Normally these will be defined by the community that collects or utilises the data.
FV03	Level 3 – Interpreted Products	These products require researcher driven analysis and interpretation, model based interpretation using other data and / or strong prior assumptions.
FV04	Level 4 – Knowledge Products	These products require researcher driven scientific interpretation and multidisciplinary data integration and include model-base interpretation using other data and/or strong prior assumptions.

---

<sup>4</sup> <http://www.aodc.gov.au/>

## 1.2 - Examples

Example data file names for each **IMOS** facility can be found in this section. These examples are suggestions only.

*Please provide eMII with feedback on this discussion document if you believe that these suggestions will not work for your facility.*

### 1.2.1 -Facility 1: ARGO

eMII intend to use the internationally accepted Argo netCDF conventions for GDAC data file naming, ie:

<FloatID>\_prof.nc, <FloatID>\_traj.nc, <FloatID>\_meta.nc, <FloatID>\_tech.nc

### 1.2.2 -Facility 2: SOOP

#### **2a Multidisciplinary Underway Network**

##### **XBT**

IMOS\_SOOP-XBT\_T\_20080501T100000Z\_PX02\_FV01.nc

This file would contain quality controlled Temperature data starting from the 1<sup>st</sup> May 2008 at 10:00 UTC and collected along XBT line PX02 by the XBT group in the **IMOS** SOOP Multidisciplinary Underway Network sub-facility.

##### **CO2**

IMOS\_SOOP-CO2\_GST\_20080901T120000Z\_VLHJ\_FV01.nc

This file would contain quality controlled Gas, Salinity and Temperature data starting from the 1<sup>st</sup> September 2008 at 12:00 UTC and collected with the CO2 system (and associated underway systems) on the Southern Surveyor by the CO2 group in the **IMOS** SOOP Multidisciplinary Underway Network sub-facility.

### **CPR**

IMOS\_SOOP-CPR\_B\_20080901T120000Z\_U001\_FV01.nc

This file would contain quality controlled Biological data starting from the 1<sup>st</sup> September 2008 at 12:00 UTC collected with CPR Unit 1 by the CPR group in the **IMOS** SOOP Multidisciplinary Underway Network sub-facility.

### **2b Sensors on Tropical Research Vessels**

IMOS\_SOOP-TRV\_BTS\_20081011T083000Z\_VNCF\_FV01.nc

This file would contain quality controlled Biological, Temperature and Salinity data starting from the 11<sup>th</sup> October 2008 at 08:30 UTC collected on RV Cape Ferguson by the **IMOS** SOOP Sensors on Tropical Research Vessels sub-facility.

### **2c SST**

IMOS\_SOOP-SST\_T\_20081030T122500Z\_VHW5167\_FV00.nc

This file would contain raw Temperature data starting from the 30<sup>th</sup> of October 2008 at 12:25 UTC, collected from the Rottneest Island Ferry (callsign VHW5167) by the **IMOS** SOOP SST sub-facility.

### **2d Air-Sea Flux**

IMOS\_SOOP-ASF\_MT\_20080204T100000Z\_VLHJ\_FV01.nc

This file would contain quality controlled Meteorological and Temperature data starting from the 4<sup>th</sup> of February 2008 at 10:00 UTC, collected from the Southern Surveyor (callsign VLHJ) by the **IMOS** SOOP Air-Sea Flux sub-facility.

## *1.2.3 -Facility 3: SOTS*

IMOS\_SOTS\_E\_20081011T083000Z\_PULSEH\_FV00.nc

This file would contain raw Engineering data starting from the 11<sup>th</sup> October 2008 at 08:30 UTC collected by the Heavy Pulse platform of the **IMOS** SOTS facility.

### *1.2.4 -Facility 4: ANFOG*

IMOS\_ANFOG\_TS\_20081011T083000Z\_SG154\_FV01.nc

This file would contain quality controlled Temperature and Salinity data starting from the 11<sup>th</sup> October 2008 at 08:30 UTC collected by Seaglider Unit 154 of the **IMOS** ANFOG facility.

### *1.2.5 -Facility 5: AUV*

IMOS\_AUV\_TS\_20080812T122500Z\_SIRIUS\_FV00.nc

This file would contain raw Temperature and Salinity data starting from the 12<sup>th</sup> August 2008 at 12:25 UTC collected by AUV Sirius of the **IMOS** AUV facility.

### *1.2.6 -Facility 6: ANMN*

#### **6a Qld and Northern Aust**

IMOS\_ANMN-QLD\_VT\_20080801T000000Z\_GBRMYR\_FV01.nc

This file would contain quality controlled Current Velocity and Temperature data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the Myrmidon mooring site by the **IMOS** ANMN Queensland and Northern Australia sub-facility.

#### **6b NSW**

IMOS\_ANMN-NSW\_VT\_20080801T000000Z\_JB070\_FV01.nc

This file would contain quality controlled Current Velocity and Temperature data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the Jervis Bay mooring site by the **IMOS** ANMN NSW sub-facility.

### **6c SA**

IMOS\_ANMN-SA\_VT\_20080801T000000Z\_SAM1DS\_FV01.nc

This file would contain quality controlled Current Velocity and Temperature data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the M1 Deep Slope mooring site by the **IMOS** ANMN SA sub-facility.

### **6d WA**

IMOS\_ANMN-WA\_VT\_20080801T000000Z\_WATR05\_FV01.nc

This file would contain quality controlled Current Velocity and Temperature data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the Two Rocks 50m mooring site by the **IMOS** ANMN WA sub-facility.

### **6e Acoustic Observatories**

IMOS\_ANMN-PA\_B\_20080801T000000Z\_PAPCA1\_FV00.nc

This file would contain raw Biological data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the Perth Canyon 1 mooring site by the **IMOS** ANMN Acoustic Observatories sub-facility.

### **6f NRS**

IMOS\_ANMN-NRS\_STV\_20080801T000000Z\_NRSMAI\_FV01.nc

This file would contain quality controlled Salinity, Temperature, Current Velocity and data starting from the 1<sup>st</sup> August 2008 at 00:00 UTC and collected at the Maria Island mooring site by the **IMOS** ANMN NRS sub-facility.

## *1.2.7 -Facility 7: ACORN*

IMOS\_ACORN\_VW\_20081122T133000Z\_TAN\_FV01.nc

This file would contain quality controlled current Velocity and Wave parameters from the Queensland radar site located at Tannum Sands and Elliot Islands, from the **IMOS** ACORN facility and for the date of 22<sup>nd</sup> of November 2008 at 13:30 UTC.

### *1.2.8 -Facility 8: AATAMS*

IMOS\_AATAMS\_B\_20081231T013000Z\_NL4\_FV01.nc

This file would contain quality controlled Biological data starting from the 31<sup>st</sup> December 2008 at 01:30 UTC collected at location 4 on the North Line acoustic receiver installation of the **IMOS** AATAMS facility.

### *1.2.9 -Facility 9: FAIMMS*

IMOS\_FAIMMS\_T\_20081231T013000Z\_HIRP1\_FV01.nc

This file would contain quality controlled Temperature data starting from the 31<sup>st</sup> December 2008 at 01:30 UTC collected on Heron Island Relay Pole 1 by the **IMOS** FAIMMS facility.

### *1.2.10 - Facility 11: SRS*

IMOS\_SRS-A\_T\_20080801T231000Z\_AVHRR17-L-AVHRR18-L\_FV03\_L3-GHRSST-SSTsubskin-14day-mosaic\_C-20081112T125500Z.nc

This file would contain Temperature data in a 'SST subskin' product as a 14 day mosaic from the L3-GHRSST-AVHRR17-L platform starting from the 1<sup>st</sup> August 2008 at 23:10 UTC, produced by the **IMOS** SRS facility.